

BluLub è un nuovo materiale ad alte prestazioni composto da lubrificanti solidi di ultima generazione UHMW-PE. **BluLub** migliora il limite PV rispetto allo standard UHMW-PE, soprattutto nelle applicazioni dove la lubrificazione è limitata o assente e le velocità e/o i carichi sono elevati. **BluLub** ti fa consumare meno energia e con un basso coefficiente di attrito, migliora la stabilità del prodotto, l'usura della catene e de nastri modulari allungandone la vita utile.

BluLub is a new high-performance compounded UHMW-PE material with the latest generation of solid lubricants. **BluLub** contributes to improve PV-properties compared to standard UHMW-PE, especially in applications with limited lubrication, higher speeds and/or higher loads. **BluLub** requires less energy and with the lower coefficient of friction, improves the product stability and wear life of chains and modular belts.

BluLub ist ein neues High-Performance UHMW-PE Material mit der neuesten Generation von festen Schmierstoffen. **BluLub** trägt dazu bei die PV-Eigenschaften im Vergleich zu Standard-UHMW-PE zu verbessern, vor allem in Anwendungen mit begrenzter Schmierung, höheren Geschwindigkeiten und / oder höheren Lasten. Mit **BluLub** wird weniger Energie benötigt. Mit dem niedrigeren Reibungskoeffizienten, verbessert sich die Produktstabilität. Die Standzeiten von Ketten und Modulbändern werden erhöht.

Properties:






- UHMW-PE Polyethylene with molecular density 5,600,000 g/mol or 9,200,000 g/mol.
- Operating temperature: -40 to 176°F (-40 to + 80°C)
- BluLub complies with the Code of Federal Regulations of FDA

Advantages:


- Running dry
- High speed
- Reduced noise and squeaking
- Lower Coefficient of Friction
- Lower wear
- Less energy consumption
- Minimal moisture absorption
- Smooth and quite chain running

Vorteile

- Trockenlauf
- Hohe Geschwindigkeit
- Reduzierte Geräuschentwicklung und kein "Quietschen"
- Niedrigerer Reibwert
- Geringerer Verschleiß
- Weniger Energieverbrauch
- Minimale Feuchtaufnahme
- Ruhiger Lauf der Kette

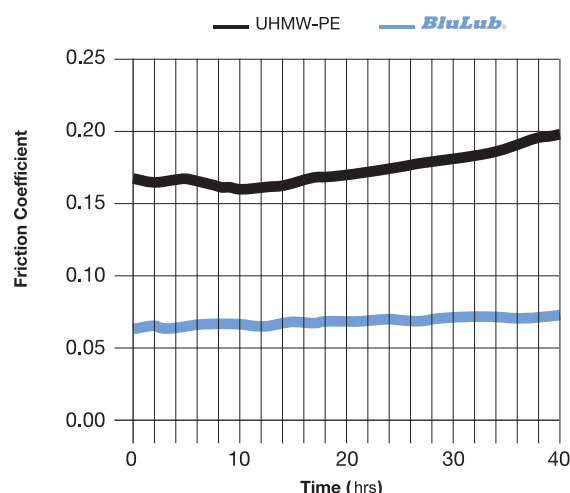

































Less Friction Compared to UHMW-PE

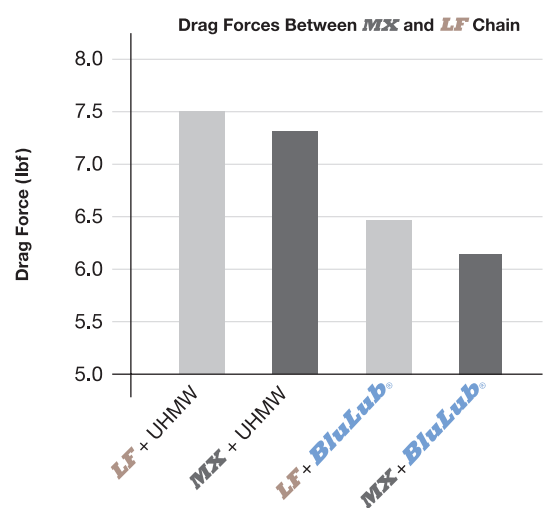



Chain / Wear Strip Configuration



101 Pag 268	102 Pag 268	176 Pag 269	1074 Pag 269	103 Pag 270	104 Pag 270
179 Pag 271	175 Pag 271	1038 Pag 272	150 Pag 272	1058 Pag 272	174 Pag 272
1014 Pag 273	1015 Pag 273	1016 Pag 273	1017 Pag 273	1018 Pag 274	1019 Pag 274
1020 Pag 274	1021 Pag 275	1022 Pag 275	1023 Pag 275	1024 Pag 275	1025 Pag 276
1026 Pag 276	1027 Pag 276	1028 Pag 276	1046 Pag 276	1029 Pag 277	1030 Pag 277
1031 Pag 277	1032 Pag 277	1033 Pag 278	1034 Pag 278	1035 Pag 278	105 Pag 279
106 Pag 279	107 Pag 279	108 Pag 279	109 Pag 280	110 Pag 280	156 Pag 281
112 Pag 281	147 Pag 281	133 Pag 282	148 Pag 282	157 Pag 283	118 Pag 284

149  Pag 284	177  Pag 284	1059  Pag 285	178  Pag 285	111  Pag 285	1060  Pag 286
199  Pag 286	U-PROFILE  Pag 287	U-PROFILE SV  Pag 287	180  Pag 288	181  Pag 288	1052  Pag 288
1000  Pag 289	1001  Pag 289	1002  Pag 289	1003  Pag 289	1004  Pag 289	1006  Pag 290
153  Pag 290	1007  Pag 291	1008  Pag 291	1009  Pag 291	1010  Pag 292	1011  Pag 292
1012  Pag 292	1013  Pag 292	1040  Pag 293	119  Pag 294	120  Pag 294	121  Pag 294
152  Pag 294	1067  Pag 294	122  Pag 295	123  Pag 295	140  Pag 295	146  Pag 295
124  Pag 296	143  Pag 296	141  Pag 296	142  Pag 296	125  Pag 297	144  Pag 297
184  Pag 297	145  Pag 297	130  Pag 298	188  Pag 298	131  Pag 298	199  Pag 298
151  Pag 299/300	170  Pag 301	168  Pag 301	169  Pag 301	1036  Pag 301	1037  Pag 301
167  Pag 302	171  Pag 302	172  Pag 302	173  Pag 302	192  Pag 302	1062  Pag 303
1068  Pag 303	1072  Pag 303	1073  Pag 303	163  Pag 304	160  Pag 304	161  Pag 304

162 Pag 304	164 Pag 304	165 Pag 304	154 Pag 305	155 Pag 305	134 Pag 305
1041 Pag 306	1042 Pag 306	1043 Pag 306	1044 Pag 307	1045 Pag 307	1053 Pag 307
1054 Pag 307	135 Pag 308	136 Pag 308	137 Pag 309	117 Pag 310	1055 Pag 310
159 Pag 310	1063 Pag 311	1064 Pag 311	158 Pag 312	158 Pag 312	182 Pag 313
1065 Pag 313	189 Pag 314	189 Pag 314	193 Pag 315	187 Pag 315	1056 Pag 316
1057 Pag 316	186 Pag 317	1061 Pag 317	166 Pag 318	1039 Pag 318	183 Pag 318
113 Pag 319	113 Pag 319	114 Pag 319	116 Pag 320	116 Pag 320	115 Pag 320

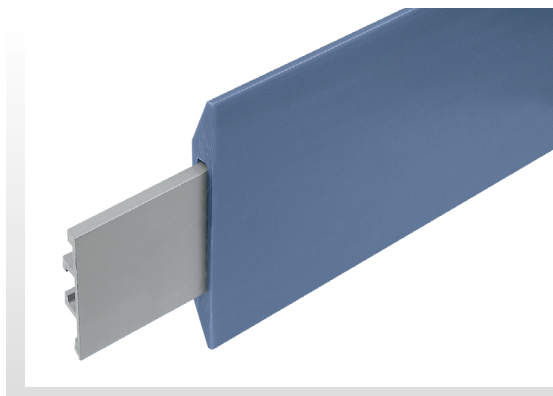
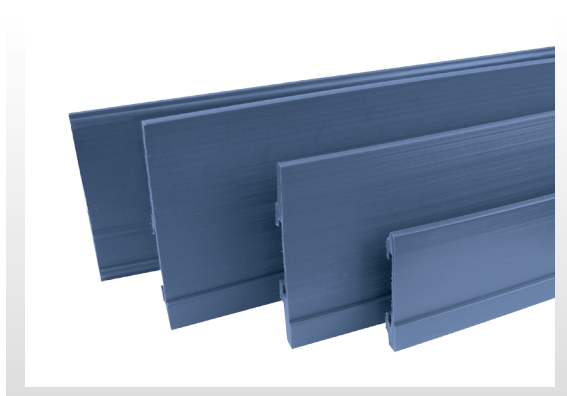


Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

101 Profilo "Z" Z-Profile / Z-Profil

On request available in white color





Part	Article-Nr.	Colour	Availability
101	10101	black	Stock item
101	10102	green	Stock item





102 Profilo "Z" rinforzato Z-Profile reinforced / Z-Profil, verstärkt

On request available in white color

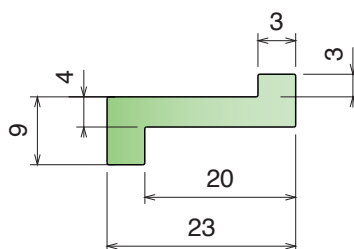

Part	Article-Nr.	Colour	Availability
102	10201	black	Stock item
102	10202	green	Stock item

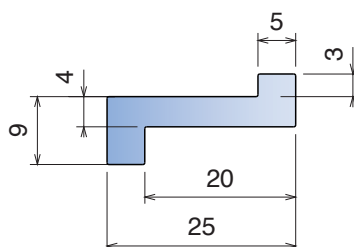

Part	Article-Nr.	Colour	Availability
102	10299B	BluLub	Stock item



Material:



Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
 Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
 Operating temperature: -40 to 176°F (-40 to +80°C)

176-1074

Guide estruse / Extruded profiles / Extrudiertes Profil

176 Profilo "Z" Z-Profile / Z-Profil

On request available in white color





Part	Article-Nr.	Colour	Availability
176	17601	black	Stock item
176	17602	green	Stock item



1074 Profilo "Z" Z-Profile / Z-Profil

On request available in white color

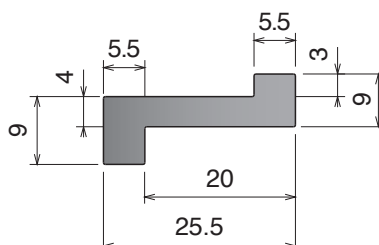

Part	Article-Nr.	Colour	Availability
1074	107401	black	Stock item





Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
 Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
 Operating temperature: -40 to 176°F (-40 to +80°C)



103

Profilo Z-clip senza bordo
 Z-clip profile without nose / Z Profil ohne Nase

Fit on 2,5 to 3,5 mm

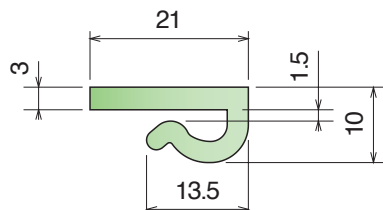

Part	Article-Nr.	Colour	Availability
103	10301	black	Stock item
103	10302	green	Stock item
103	10303	white	Stock item


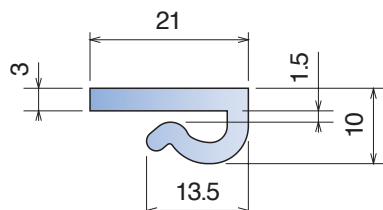



Part	Article-Nr.	Colour	Availability
103	10300B-30	BluLub	Stock item



104

Profilo Z-clip con bordo
 Z-clip profile with nose / Z Profil mit Nase

Fit on 2,5 to 3,5 mm

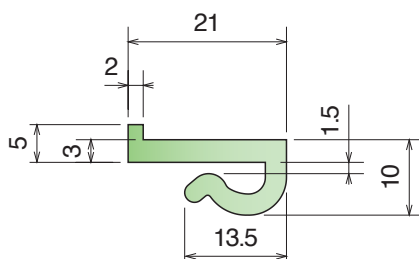

Part	Article-Nr.	Colour	Availability
104	10401	black	Stock item
104	10402	green	Stock item
104	10403	white	Stock item

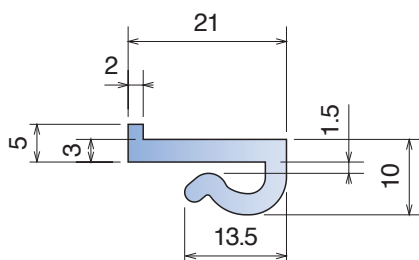

Part	Article-Nr.	Colour	Availability
104	10400B	BluLub	Stock item

Material:



Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

179-175

Guide estruse / Extruded profiles / Extrudiertes Profil

179 Profilo Z-clip con bordo Z-clip profile with nose / Z Profil mit Nase

On request available in white color | Fit on 2,5 to 3,5 mm





Part	Article-Nr.	L	Colour	Availability
179	17901C	3 m	black	Stock item
179	17901	6 m	black	On request
179	17902C	3 m	green	Stock item
179	17902	6 m	green	On request
179	17902-60	60 m	green	Stock item



175 Profilo "L" L-Profile / L-Profil

On request available in white color



Part	Article-Nr.	Colour	Availability
175	17501	black	Stock item
175	17502	green	Stock item



Material:



Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)


1038

Profilo "L"
L-Profile / L-Profil

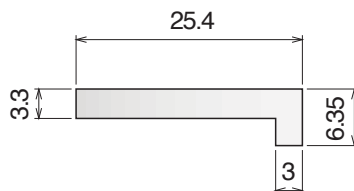

Part	Article-Nr.	L	Colour	Availability
1038	103803	60 m	white	On request



**NORTH
AMERICA
STANDARD**



150

Profilo "L"
L-Profile / L-Profil

On request available in white color


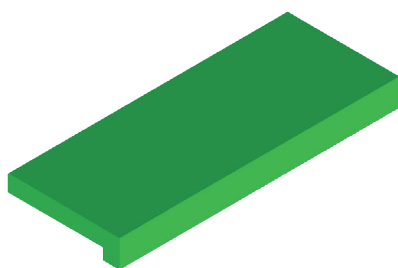


Part	Article-Nr.	Colour	Availability
150	15001	black	Stock item
150	15002	green	Stock item



1058

Profilo "L"
L-Profile / L-Profil

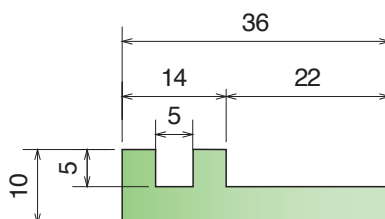



Part	Article-Nr.	L	Colour	Availability
1058	105801C	3 m	black	Stock item
1058	105801	6 m	black	On request
1058	105802C	3 m	green	Stock item
1058	105802	6 m	green	On request



174

Profilo "L"
L-Profile / L-Profil

On request available in white color

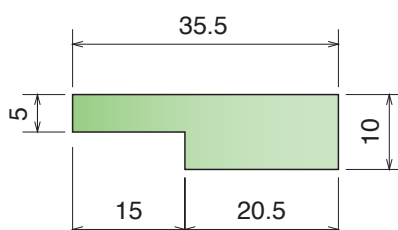

Part	Article-Nr.	L	Colour	Availability
174	17401C	3 m	black	Stock item
174	17401	6 m	black	On request
174	17402C	3 m	green	Stock item
174	17402	6 m	green	On request



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)



1014-1015-1016-1017

Guide estruse / Extruded profiles / Extrudiertes Profil

1014

Profilo J-Leg 19.05
J-Leg Profile 19.05 / J Profil mit Nase 19.05

Fit on 3 mm

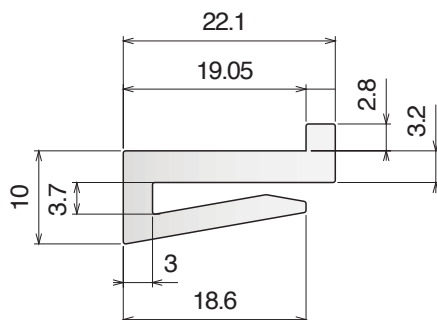

Part	Article-Nr.	L	Colour	Availability
1014	101403C	3 m	white	On request
1014	101403	6 m	white	On request



**NORTH
AMERICA
STANDARD**



1015

Profilo J-Leg 19.05
J-Leg Profile 19.05 / J Profil mit Nase 19.05

Fit on 3 mm

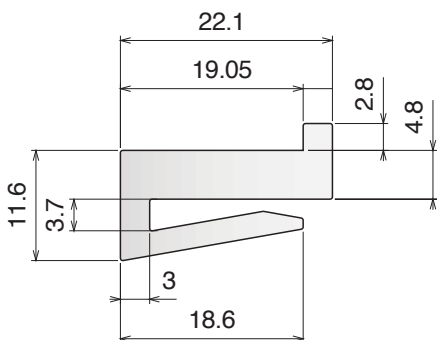

Part	Article-Nr.	L	Colour	Availability
1015	101503C	3 m	white	On request
1015	101503	6 m	white	On request



**NORTH
AMERICA
STANDARD**



1016

Profilo J-Leg 19.05
J-Leg Profile 19.05 / J Profil mit Nase 19.05

Fit on 3 mm

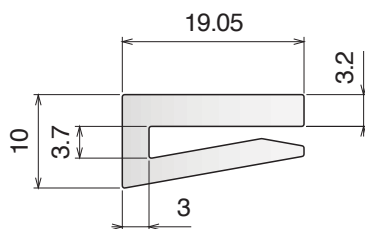

Part	Article-Nr.	L	Colour	Availability
1016	101603C	3 m	white	On request
1016	101603	6 m	white	On request
1016	101603-30	30 m	white	On request



**NORTH
AMERICA
STANDARD**



1017

Profilo J-Leg 25.4
J-Leg Profile 25.4 / J Profil 25.4

Fit on 3 mm

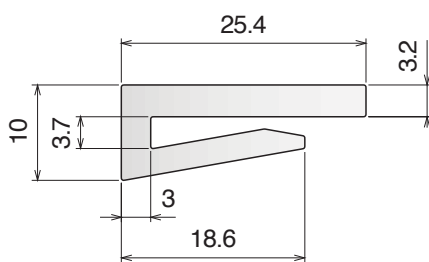

Part	Article-Nr.	L	Colour	Availability
1017	101703C	3 m	white	On request
1017	101703	6 m	white	On request
1017	101703-30	30 m	white	On request
1017	101703-75	75 m	white	On request

**NORTH
AMERICA
STANDARD**



Material:



Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

1018

Profilo J-Leg 25.4


J-Leg Profile 25.4 / J Profil 25.4

Fit on 3 mm

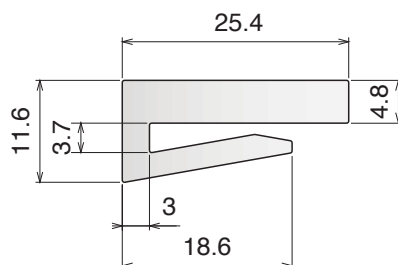

Part	Article-Nr.	L	Colour	Availability
1018	101803C	3 m	white	On request
1018	101803	6 m	white	On request

**NORTH
AMERICA
STANDARD**





3/6 m

1019

Profilo J-Leg 25.4

J-Leg Profile 25.4 / J Profil 25.4

Fit on 3 mm

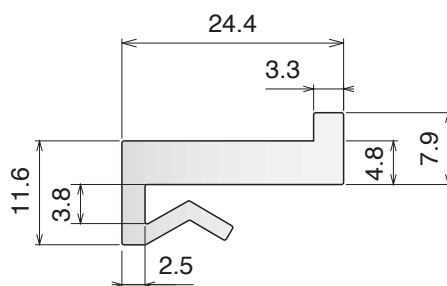

Part	Article-Nr.	L	Colour	Availability
1019	101903C	3 m	white	On request
1019	101903	6 m	white	On request

**NORTH
AMERICA
STANDARD**





3/6 m

1020

Profilo J-Leg 25.4

J-Leg Profile 25.4 / J Profil 25.4

Fit on 3 mm

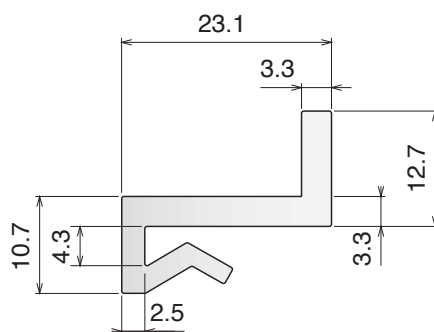

Part	Article-Nr.	L	Colour	Availability
1020	102003C	3 m	white	On request
1020	102003	6 m	white	On request

**NORTH
AMERICA
STANDARD**



3/6 m

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)



1021-1022-1023-1024

Guide estruse / Extruded profiles / Extrudiertes Profil

1021


Profilo J-Leg 25.4
J-Leg Profile 25.4 / J Profil 25.4

Fit on 3 mm

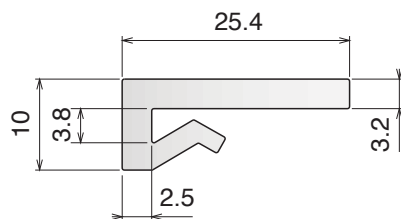

Part	Article-Nr.	L	Colour	Availability
1021	102103C	3 m	white	On request
1021	102103	6 m	white	On request
1021	102103-30	30 m	white	On request
1021	102103-75	75 m	white	On request



**NORTH
AMERICA
STANDARD**



1022


Profilo J-Leg 25.4
J-Leg Profile 25.4 / J Profil 25.4

Fit on 3 mm

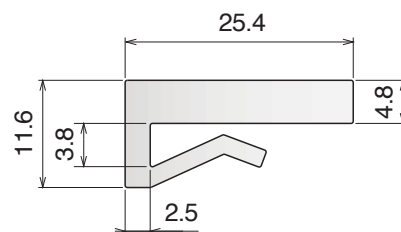

Part	Article-Nr.	L	Colour	Availability
1022	102203C	3 m	white	On request
1022	102203	6 m	white	On request
1022	102203-30	30 m	white	On request



**NORTH
AMERICA
STANDARD**



1023


Profilo J-Leg 25.4
J-Leg Profile 25.4 / J Profil 25.4

Fit on 3 mm

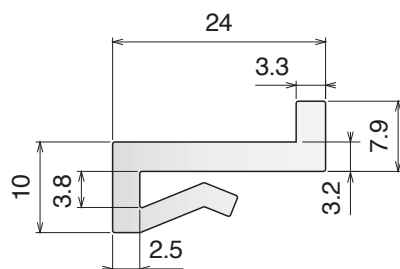

Part	Article-Nr.	L	Colour	Availability
1023	102303C	3 m	white	On request
1023	102303	6 m	white	On request



**NORTH
AMERICA
STANDARD**



1024


Profilo J-Leg 25.4
J-Leg Profile 25.4 / J Profil 25.4

Fit on 3 mm

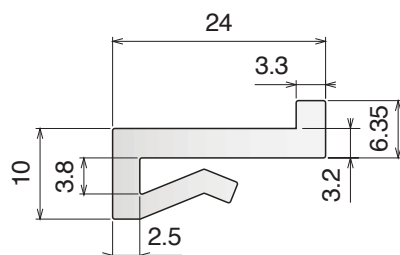

Part	Article-Nr.	L	Colour	Availability
1024	102403C	3 m	white	On request
1024	102403	6 m	white	On request
1024	102403-30	30 m	white	On request
1024	102402	6 m	green	On request

**NORTH
AMERICA
STANDARD**



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)



Operating temperature: -40 to 176°F (-40 to +80°C)

1025

Profilo J-Leg 38.1

J-Leg Profile 38.1 / J Profil 38.1

Fit on 3 mm

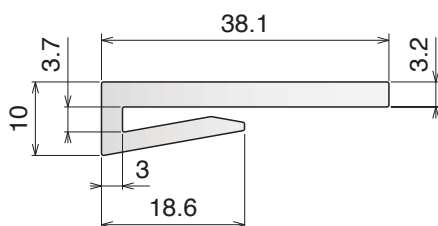

Part	Article-Nr.	L	Colour	Availability
1025	102503C	3 m	white	On request
1025	102503	6 m	white	On request
1025	102503-30	30 m	white	On request

**NORTH
AMERICA
STANDARD**





1026

Profilo J-Leg 38.1

J-Leg Profile 38.1 / J Profil 38.1

Fit on 3 mm

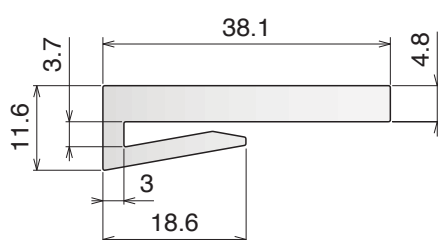

Part	Article-Nr.	L	Colour	Availability
1026	102603C	3 m	white	On request
1026	102603	6 m	white	On request

**NORTH
AMERICA
STANDARD**





1027

Profilo J-Leg 38.1

J-Leg Profile 38.1 / J Profil mit Nase 38.1

Fit on 3 mm

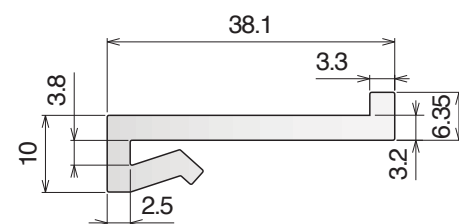

Part	Article-Nr.	L	Colour	Availability
1027	102703C	3 m	white	On request
1027	102703	6 m	white	On request

**NORTH
AMERICA
STANDARD**





1028

Profilo J-Leg 38.1

J-Leg Profile 38.1 / J Profil 38.1

Fit on 3 mm

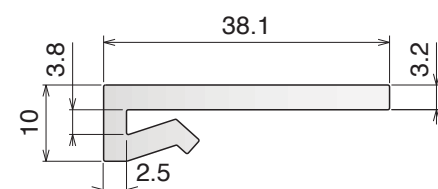

Part	Article-Nr.	L	Colour	Availability
1028	102803C	3 m	white	On request
1028	102803	6 m	white	On request

**NORTH
AMERICA
STANDARD**





1046

Profilo J-Leg 40

J-Leg Profile 40 / J Profil 40

Fit on 3 mm

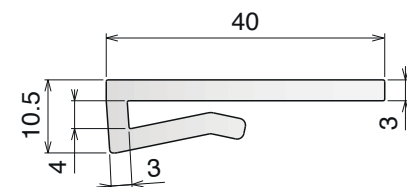

Part	Article-Nr.	L	Colour	Availability
1046	104602C	3 m	green	On request
1046	104603C	3 m	white	On request
1046	104602-30	30 m	green	On request



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

1029-1030-1031-1032



Guide estruse / Extruded profiles / Extrudiertes Profil

1029


Profilo J-Leg 50.8
J-Leg Profile 50.8 / J Profil 50.8

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability
1029	102903C	3 m	white	On request
1029	102903	6 m	white	On request

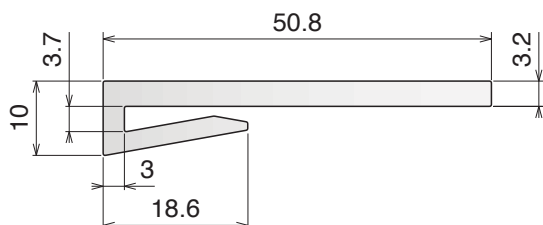

**NORTH
AMERICA
STANDARD**





1030


Profilo J-Leg 50.8
J-Leg Profile 50.8 / J Profil 50.8

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability
1030	103003C	3 m	white	On request
1030	103003	6 m	white	On request

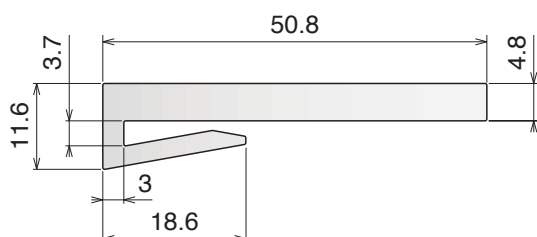

**NORTH
AMERICA
STANDARD**





1031


Profilo J-Leg 50.8
J-Leg Profile 50.8 / J Profil 50.8

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability
1031	103103C	3 m	white	On request
1031	103103	6 m	white	On request

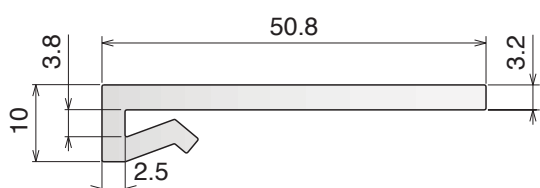

**NORTH
AMERICA
STANDARD**





1032


Profilo J-Leg 50.8
J-Leg Profile 50.8 / J Profil 50.8

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability
1032	103203C	3 m	white	On request
1032	103203	6 m	white	On request

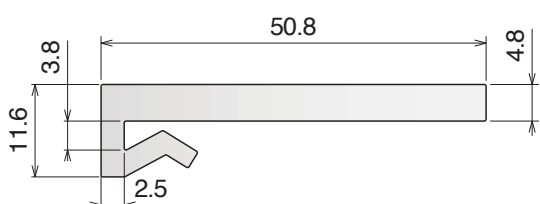

**NORTH
AMERICA
STANDARD**



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol

Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

1033


Profilo J-Leg 76.2

J-Leg Profile 76.2 / J Profil 76.2


Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability
1033	103303C	3 m	white	On request
1033	103303	6 m	white	On request

**NORTH
AMERICA
STANDARD**



3/6 m

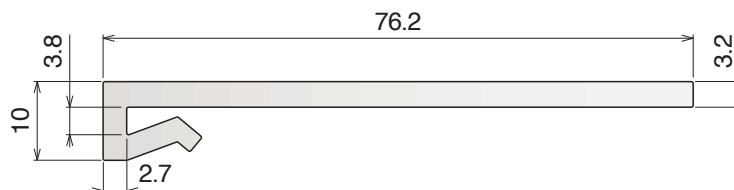

1034

Profilo J-Leg 76.2

J-Leg Profile 76.2 / J Profil 76.2


Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability
1034	103403C	3 m	white	On request
1034	103403	6 m	white	On request

**NORTH
AMERICA
STANDARD**



3/6 m

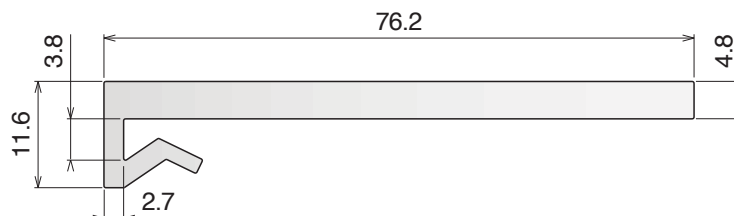

1035

Profilo J-Leg 73

J-Leg Profile 73 / J Profil 73


Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability
1035	103503C	3 m	white	On request
1035	103503	6 m	white	On request

**NORTH
AMERICA
STANDARD**



3/6 m

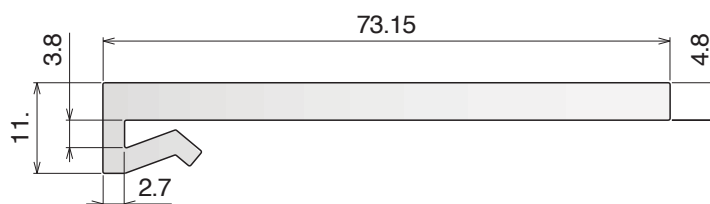

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)



105-106-107-108

Guide estruse / Extruded profiles / Extrudiertes Profil

105

Profilo piatto
Flat profile / Flachprofil

On request available in white color





Part	Article-Nr.	A	B	Colour	Availability
105	10501	20	3	black	Stock item
105	10502	20	3	green	Stock item
105	10503	20	5	black	Stock item
105	10504	20	5	green	Stock item
105	10595	25	3	green	Stock item
105	10592	30	3	green	On request
105	10594	30	5	green	On request
105	10596	40	3	green	Stock item
105	10597	50	3	green	On request
105	10505	60	3	black	Stock item
105	10506	60	3	green	Stock item
105	10507	70	3	black	Stock item
105	10508	70	3	green	Stock item
105	10509	100	3	black	On request
105	10510	100	3	green	Stock item

106

Profilo guida catena
Flat profile with nose / Flachprofil mit Nase

On request available in white color

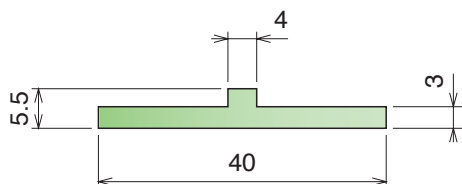



Part	Article-Nr.	Colour	Availability
106	10601	black	Stock item
106	10602	green	Stock item

107

Profilo guida catena
Wear strip / Rückführleiste

On request available in white color



Part	Article-Nr.	Colour	Availability
107	10701	black	Stock item
107	10702	green	Stock item






Supports Available:
PART 230-231
Pag 332

108

Profilo T
T-profile / T-Profil

On request available in white color | Fit on 4 mm

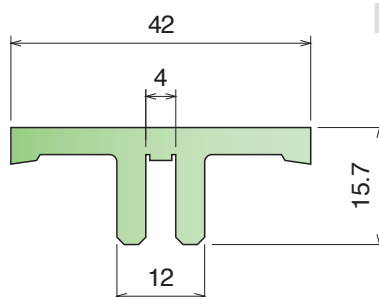



Part	Article-Nr.	L	Colour	Availability
108	10801C	3 m	black	Stock item
108	10801	6 m	black	On request
108	10802C	3 m	green	Stock item
108	10802	6 m	green	On request

Material:



Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

109

Profilo clip-on guida catena
Flat clip-on wear strip / U-Profil Clip-on

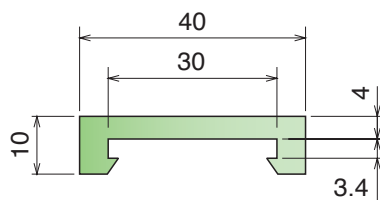

Part	Article-Nr.	L	Colour	Availability
109	10901C	3 m	black	Stock item
109	10901	6 m	black	On request
109	10902C	3 m	green	Stock item
109	10902	6 m	green	On request
109	10903C	3 m	white	Stock item
109	10903	6 m	white	Stock item

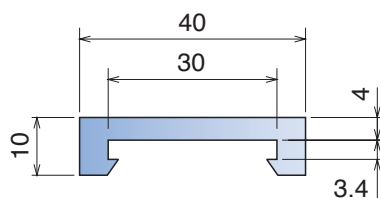



Part	Article-Nr.	L	Colour	Availability
109	10901BC	3 m	BluLub	Stock item
109	10901B	6 m	BluLub	On request
109	10901B-30	30 m	BluLub	On request



110

Profilo clip-on guida catena con bordo
Flat clip-on wear strip with nose / U-Profil Clip-on mit Nase

On request available in white color

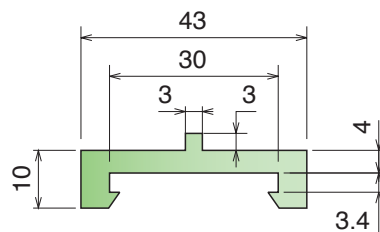



Part	Article-Nr.	L	Colour	Availability
110	11001C	3 m	black	Stock item
110	11001	6 m	black	On request
110	11002C	3 m	green	Stock item
110	11002	6 m	green	On request



156

Profilo clip-on guida tappeto
Clip-on wear strip for belt / Clip-on m. Seitenführung



On request available in white color



Part	Article-Nr.	L	Colour	Availability
156	15601C	3 m	black	Stock item
156	15601	6 m	black	On request
156	15602C	3 m	green	Stock item
156	15602	6 m	green	On request



3/6 m





Part	Article-Nr.	L	Colour	Availability
156	15699C	3 m	green	On request



3 m

112

Profilo
Profile / Profil



Part	Article-Nr.	L	Material	Availability
112	11201C	3 m	AISI 304	Stock item
112	11201	6 m	AISI 304	On request
112	11202C	3 m	AISI 430	Stock item
112	11202	6 m	AISI 430	On request



Assembly with
accessories at
pages 285-286



3/6 m

147

Profilo in alluminio
Aluminum profile / Aluminium-Profil



Part	Article-Nr.	L	Material	Availability
147	14701C	3 m	Aluminium	Stock item
147	14701	6 m	Aluminium	On request



3/6 m

Material:



Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

133

Profilo assemblato clip-on

Profile assembled clip-on / Profile montiert clip-on

On request available in white color



Part	Article-Nr.	L	Material	Colour	Availability
133	13301C	3 m	AISI 304	green	Stock item
133	13301	6 m	AISI 304	green	On request
133	13302C	3 m	AISI 430	green	Stock item
133	13302	6 m	AISI 430	green	On request
133	13303C	3 m	AISI 304	black	Stock item
133	13303	6 m	AISI 304	black	On request
133	13304C	3 m	AISI 430	black	Stock item
133	13304	6 m	AISI 430	black	On request
133	13305BC	3 m	AISI 304	BluLub	Stock item
133	13305B	6 m	AISI 304	BluLub	On request
133	13306BC	3 m	AISI 430	BluLub	Stock item
133	13306B	6 m	AISI 430	BluLub	On request

Assembly with
accessories at
pages 319-320





3/6 m

148

Profilo assemblato clip-on

Profile assembled clip-on / Profile montiert clip-on



Part	Article-Nr.	L	Material	Colour	Availability
148	14801C	3 m	Aluminium	green	Stock item
148	14801	6 m	Aluminium	green	On request
148	14801BC	3 m	Aluminium	BluLub	Stock item
148	14801B	6 m	Aluminium	BluLub	On request
148	14802C	3 m	Aluminium	black	Stock item
148	14802	6 m	Aluminium	black	On request
148	14803C	3 m	Aluminium	white	Stock item



3/6 m

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ }^{\circ}\text{F}^{-1}$ ($2 \times 10^{-4} \text{ }^{\circ}\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

157

Guide estruse / Extruded profiles / Extrudiertes Profil

157

Profilo guida tappeto assemblato

Wear strip assembled for belt / Gleitleiste für mattenketten kpl montiert




On request available in white color

Part	Article-Nr.	L	Material	Colour	Availability
157	15701C	3 m	AISI 304	green	Stock item
157	15701	6 m	AISI 304	green	On request
157	15702C	3 m	AISI 430	green	Stock item
157	15702	6 m	AISI 430	green	On request

Assembly with
accessories at
pages 319-320





3/6 m

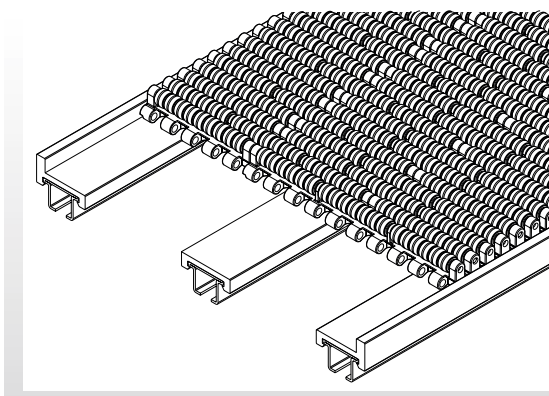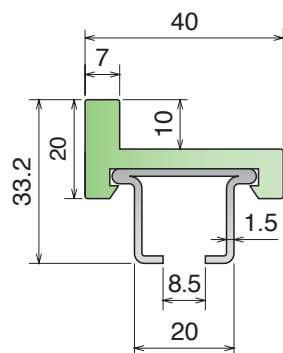

Part	Article-Nr.	L	Material	Colour	Availability
157	15799C	3 m	AISI 304	green	On request



3 m





Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

118

Profilo Delta
D-Profile / D-Profil





Part	Article-Nr.	L	Material	Availability
118	11801C	3 m	AISI 304	Stock item
118	11801	6 m	AISI 304	On request
118	11802C	3 m	AISI 430	Stock item
118	11802	6 m	AISI 430	On request



149

Profilo ad "U" con bordo
U-profile with nose / U-Profil mit Nase

On request available in white color

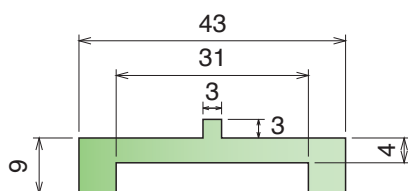

Part	Article-Nr.	L	Colour	Availability
149	14950C	3 m	black	Stock item
149	14950	6 m	black	On request
149	14952C	3 m	green	Stock item
149	14952	6 m	green	On request



Coils available





3/6 m

177

Profilo ad "U"
U-profile / U-Profil

On request available in white color

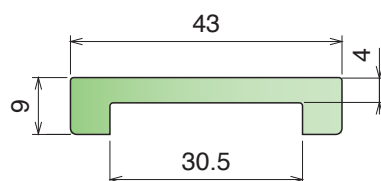

Part	Article-Nr.	L	Colour	Availability
177	17701C	3 m	black	Stock item
177	17701	6 m	black	On request
177	17702C	3 m	green	Stock item
177	17702	6 m	green	On request
177	17701BC	3 m	BluLub	Stock item
177	17701B	6 m	BluLub	On request
177	17702-30	30 m	green	On request



30 m



3/6 m

Material:



Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

1059-178-111

Guide estruse / Extruded profiles / Extrudiertes Profil

1059 Profilo ad "U" U-profile / U-Profil

On request available in white color

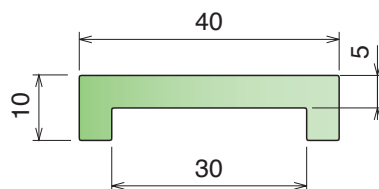

Part	Article-Nr.	L	Colour	Availability
1059	105901C	3 m	black	Stock item
1059	105901	6 m	black	On request
1059	105902C	3 m	green	Stock item
1059	105902	6 m	green	On request
1059	105901BC	3 m	BluLub	Stock item
1059	105901B	6 m	BluLub	On request





Coils available



3/6 m

178 Profilo ad "U" U-profile / U-Profil

On request available in white color

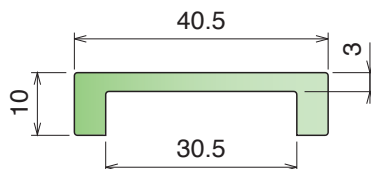

Part	Article-Nr.	L	Colour	Availability
178	17801C	3 m	black	Stock item
178	17801	6 m	black	On request
178	17802C	3 m	green	Stock item
178	17802	6 m	green	On request
178	17801BC	3 m	BluLub	Stock item
178	17801B	6 m	BluLub	On request





Coils available



3/6 m

111 Profilo ad "U" U-profile / U-Profil

On request available in white color

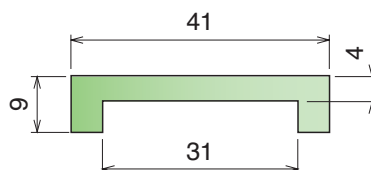

Part	Article-Nr.	L	Colour	Availability
111	11101C	3 m	black	Stock item
111	11101	6 m	black	On request
111	11102C	3 m	green	Stock item
111	11102	6 m	green	On request
111	11101-60	60 m	black	On request
111	11102-60	60 m	green	On request
111	11101BC	3 m	BluLub	Stock item
111	11101B	6 m	BluLub	On request



60 m



3/6 m



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

1060

Profilo ad "U"
U-profile / U-Profil

On request available in white color

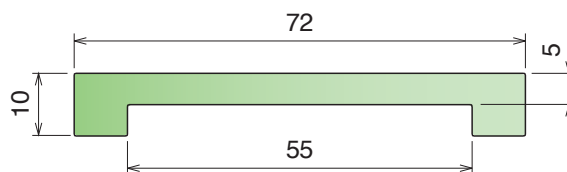

Part	Article-Nr.	L	Colour	Availability
1060	106001C	3 m	black	Stock item
1060	106001	6 m	black	On request
1060	106002C	3 m	green	Stock item
1060	106002	6 m	green	On request





Coils available



3/6 m

199

Profilo ad "U"
U-profile / U-Profil

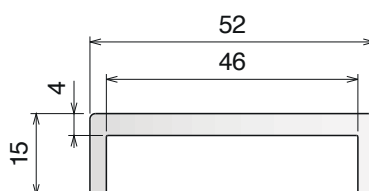

Part	Article-Nr.	L	Colour	Availability
199	19976	6 m	white	On request



6 m

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

U-Profile


Guide estruse / Extruded profiles / Extrudiertes Profil

U-Profile


Profilo ad "U" 42 mm
U-profile 42 mm / U-Profil 42 mm

On request available in white color


Part	Article-Nr.	L	Colour	Availability
199	19944B-30	30 m	BluLub	On request



30 m




Staggered version



Part	Article-Nr.	L	Colour	Availability
199	19945-30	30 m	black	Stock item
199	19945B-30	30 m	BluLub	Stock item
199	19946-30	30 m	green	Stock item




30 m

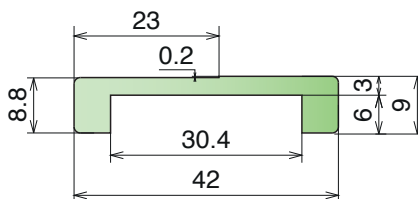

U-Profile (Staggered version)



This profile has been designed for pressure-less combiners and it is used to ensure the best side-transfer of the bottles across the chains. It is not recommended to connect these profiles and, during the installation, the correct orientation must be carefully maintained.

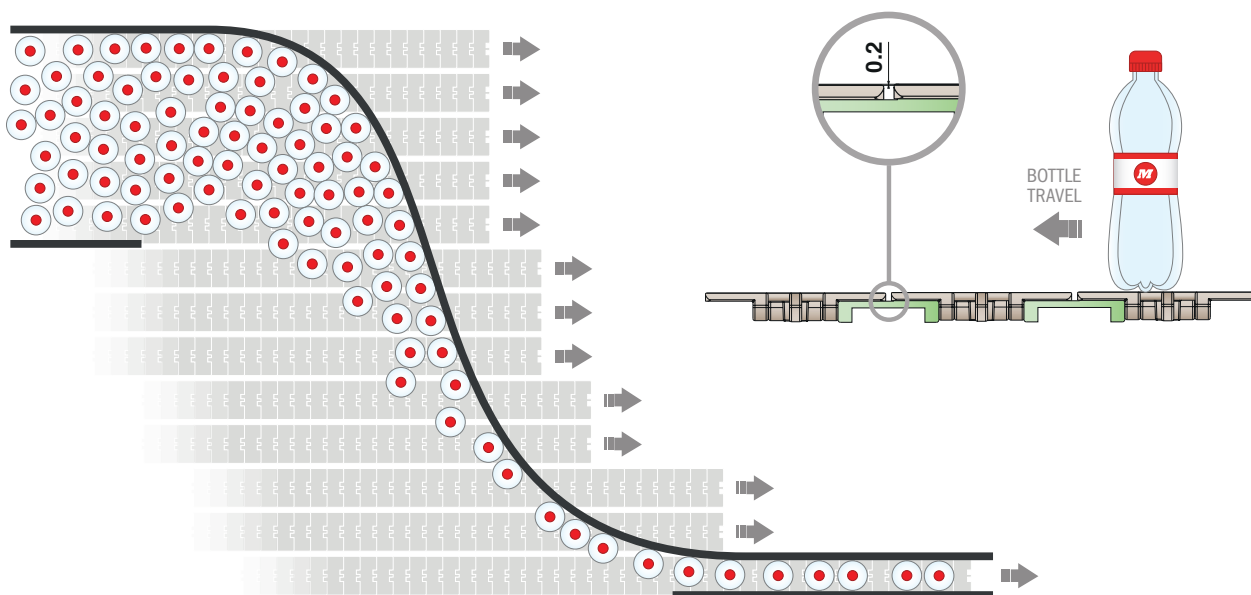


Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

180 Copri profilo Bar cover / Abdeckprofil

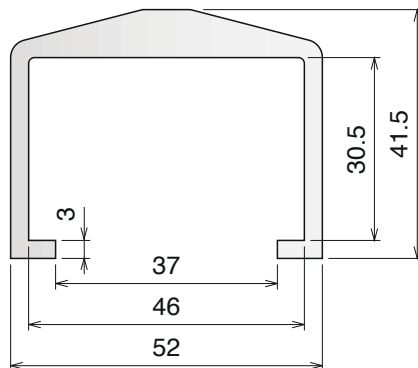



Part	Article-Nr.	L	Colour	Availability
180	18003C	3 m	white	Stock item
180	18003	6 m	white	On request



3/6 m

181 Copri profilo 25.4x25.4 Bar cover 25.4x25.4 / Abdeckprofil 25.4x25.4

Fit on 25.4x25.4 mm





Part	Article-Nr.	L	Colour	Availability
181	18103C	3 m	white	Stock item
181	18103	6 m	white	On request



3/6 m

1052 Copri profilo 38.1x50.8 Bar cover 38.1x50.8 / Abdeckprofil 38.1x50.8

Fit on 38.1x50.8 mm

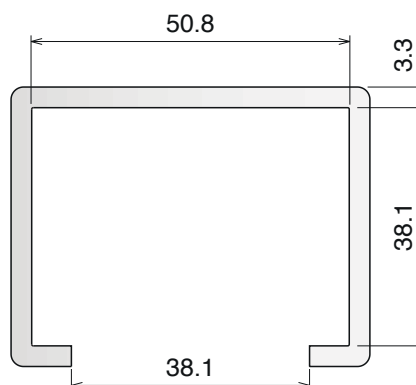

Part	Article-Nr.	L	Colour	Availability
1052	105203C	3 m	white	Stock item
1052	105203	6 m	white	On request



3/6 m

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)



1000-1001-1002-1003-1004

Guide estruse / Extruded profiles / Extrudiertes Profil

1000

Copri profilo 1.5 mm
Bar cap 1.5 mm / Abdeckprofil 1.5 mm

Fit on 1.5 mm





Part	Article-Nr.	L	Colour	Availability
1000	100003-30	30 m	white	On request



1001

Copri profilo 1.5 mm
Bar cap 1.5 mm / Abdeckprofil 1.5 mm

Fit on 1.5 mm





Part	Article-Nr.	L	Colour	Availability
1001	100103-30	30 m	white	On request



1002

Copri profilo 3 mm
Bar cap 3 mm / Abdeckprofil 3 mm

Fit on 3 mm





Part	Article-Nr.	L	Colour	Availability
1002	100203-30	30 m	white	On request



1003

Copri profilo 3 mm
Bar cap 3 mm / Abdeckprofil 3 mm

Fit on 3 mm





Part	Article-Nr.	L	Colour	Availability
1003	100303-30	30 m	white	On request



1004

Copri profilo 3 mm
Bar cap 3 mm / Abdeckprofil 3 mm

Fit on 3 mm



Part	Article-Nr.	L	Colour	Availability
1004	100403-30	30 m	white	On request





Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ }^{\circ}\text{F}^{-1}$ ($2 \times 10^{-4} \text{ }^{\circ}\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

1006

Copri profilo 5 mm
Bar cap 5 mm / Abdeckprofil 5 mm

Fit on 5 mm



Part	Article-Nr.	L	Colour	Availability
1006	100603-30	30 m	white	On request





30 m

153

Copri profilo 5 mm
Bar cap 5 mm / Abdeckprofil 5 mm

Fit on 4/5 mm




Part	Article-Nr.	L	Colour	Availability
153	15302	6 m	green	On request
153	15302C	3 m	green	On request
153	15303	6 m	white	On request
153	15303-30	30 m	white	Stock item
153	15300	6 m	BluLub	Stock item
153	15300-30	30 m	BluLub	Stock item
153	15300C	3 m	BluLub	On request



30 m



3/6 m

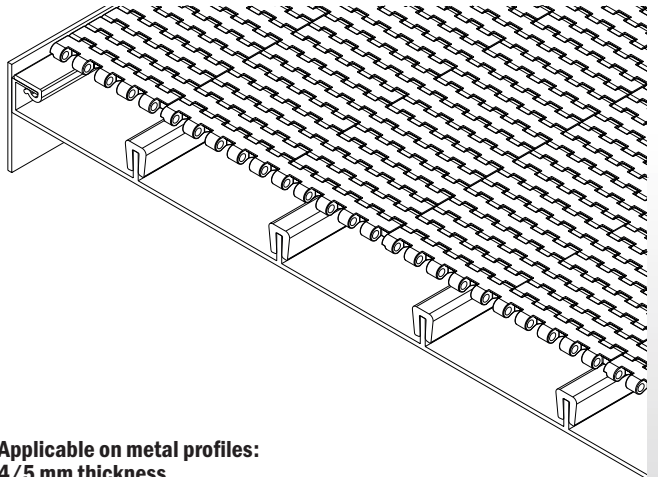

Applicable on metal profiles:
4/5 mm thickness

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

1007-1008-1009




Guide estruse / Extruded profiles / Extrudiertes Profil

1007

Copri profilo 5 mm
Bar cap 5 mm / Abdeckprofil 5 mm

Fit on 5 mm

Part	Article-Nr.	L	Colour	Availability
1007	100703	6 m	white	On request
1007	100703B	6 m	BluLub	On request

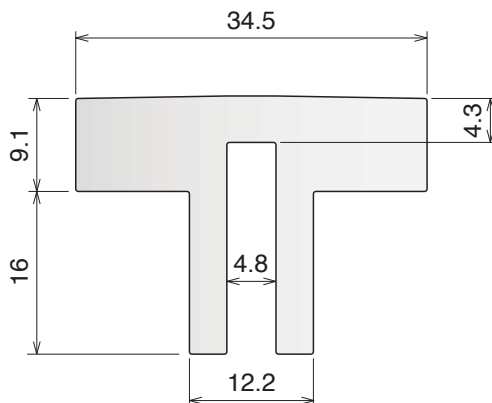




6 m

1008

Copri profilo 5 mm
Bar cap 5 mm / Abdeckprofil 5 mm

Fit on 5 mm

Part	Article-Nr.	L	Colour	Availability
1008	100803	6 m	white	On request
1008	100803B	6 m	BluLub	On request

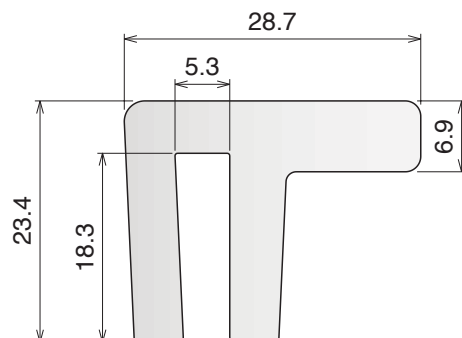



6 m

1009

Copri profilo 6 mm
Bar cap 6 mm / Abdeckprofil 6 mm

Fit on 6 mm

Part	Article-Nr.	L	Colour	Availability
1009	100903-30	30 m	white	On request



30 m



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

1010

Copri profilo 6 mm
Bar cap 6 mm / Abdeckprofil 6 mm

Fit on 6 mm





Part	Article-Nr.	L	Colour	Availability
1010	101003-30	30 m	white	On request



1011

Copri profilo 10 mm
Bar cap 10 mm / Abdeckprofil 10 mm

Fit on 10 mm





Part	Article-Nr.	L	Colour	Availability
1011	101103-30	30 m	white	On request
1011	101103-60	60 m	white	On request



1012

Copri profilo 12-13 mm
Bar cap 12-13 mm / Abdeckprofil 12-13 mm

Fit on 12/13 mm





Part	Article-Nr.	L	Colour	Availability
1012	101203-30	30 m	white	On request



1013

Copri profilo 10 mm
Bar cap 10 mm / Abdeckprofil 10 mm

Fit on 10 mm



Part	Article-Nr.	L	Colour	Availability
1013	101303	6 m	white	On request



Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
 Linear expansion coefficient: $1.1 \times 10^{-4} \text{ }^{\circ}\text{F}^{-1}$ ($2 \times 10^{-4} \text{ }^{\circ}\text{C}^{-1}$)
 Operating temperature: -40 to 176°F (-40 to +80°C)

1040

Guide estruse / Extruded profiles / Extrudiertes Profil




1040

Guide tappeto

Belt side guide / Seitentükuung für matterkette


Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability
1040	104003C	3 m	white	On request
1040	104003	6 m	white	On request

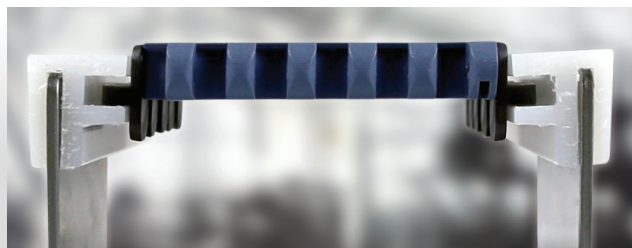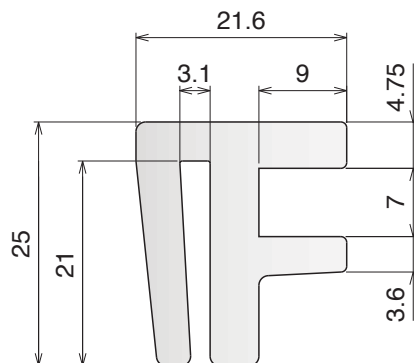


Applicable on metal profiles: 3 mm

119 Guida conica tonda Guide rail round / konische Führung rund

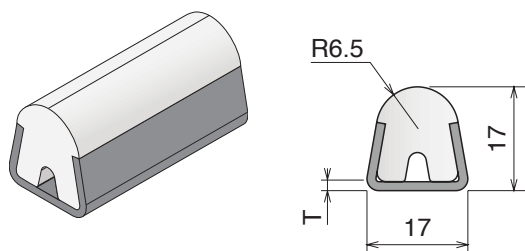


Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
119	11963	3 m	1.9	AISI 304	white	On request	
119	11967	6 m	1.9	AISI 304	white	On request	
119	11963B	3 m	1.9	AISI 304	BluLub	On request	
119	11967B	6 m	1.9	AISI 304	BluLub	On request	
119	11901C	3 m	1.5	AISI 304	white	Stock item	
119	11901	6 m	1.5	AISI 304	white	Stock item	
119	11901BC	3 m	1.5	AISI 304	BluLub	Stock item	
119	11901B	6 m	1.5	AISI 304	BluLub	Stock item	

120 Guida conica semitonda Guide rail modified / konische Führung halbrund

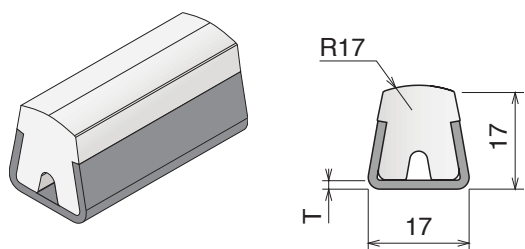


Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
120	12063	3 m	1.9	AISI 304	white	On request	
120	12067	6 m	1.9	AISI 304	white	On request	
120	12063B	3 m	1.9	AISI 304	BluLub	On request	
120	12067B	6 m	1.9	AISI 304	BluLub	On request	
120	12001C	3 m	1.5	AISI 304	white	Stock item	
120	12001	6 m	1.5	AISI 304	white	Stock item	
120	12001BC	3 m	1.5	AISI 304	BluLub	Stock item	
120	12001B	6 m	1.5	AISI 304	BluLub	Stock item	

121 Guida conica piatta Guide rail flat / konische Führung flach

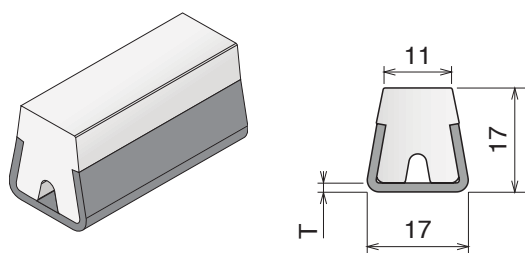


Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
121	12163	3 m	1.9	AISI 304	white	On request	
121	12167	6 m	1.9	AISI 304	white	On request	
121	12163B	3 m	1.9	AISI 304	BluLub	On request	
121	12167B	6 m	1.9	AISI 304	BluLub	On request	
121	12101C	3 m	1.5	AISI 304	white	Stock item	
121	12101	6 m	1.5	AISI 304	white	Stock item	
121	12101BC	3 m	1.5	AISI 304	BluLub	Stock item	
121	12101B	6 m	1.5	AISI 304	BluLub	Stock item	

152 Guida conica 25° Guide rail 25° / konische Führung 25°

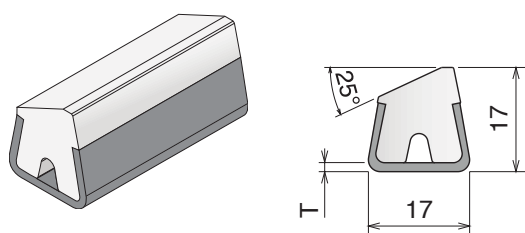



Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
152	15263	3 m	1.9	AISI 304	white	On request	
152	15201C	3 m	1.5	AISI 304	white	Stock item	
							3/6 m

1067 Guida conica H 18 Guide rail H 18 / konische Führung H 18

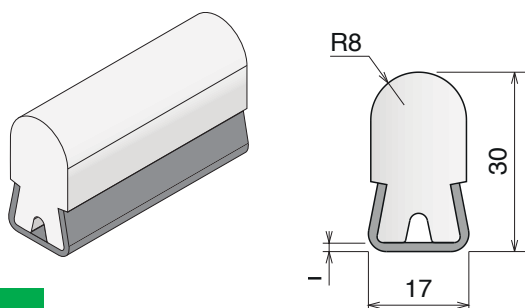


Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
1067	106763	3 m	1.9	AISI 304	white	On request	
1067	106701C	3 m	1.5	AISI 304	white	On request	
							3/6 m

122 Guida conica profilo a T 25,4 mm Guide rail T-shape 25,4 mm / konische Führung flach (T) 25,4 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
122	12263	3 m	1.9	AISI 304	white	On request	
122	12201C	3 m	1.5	AISI 304	white	Stock item	




3 m

123 Guida conica profilo a T 31,75 mm Guide rail T-shape 31,75 mm / konische Führung flach (T) 31,75 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
123	12363	3 m	1.9	AISI 304	white	On request	
123	12301C	3 m	1.5	AISI 304	white	Stock item	




3 m

140 Guida conica profilo a T 25,4 mm Guide rail T-shape 25,4 mm / konische Führung flach (T) 25,4 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
140	14063	3 m	1.9	AISI 304	white	On request	
140	14001C	3 m	1.5	AISI 304	white	Stock item	




3 m

146 Guida conica profilo a T 31,75 mm Guide rail T-shape 31,75 mm / konische Führung flach (T) 31,75 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
146	14663	3 m	1.9	AISI 304	white	On request	
146	14601C	3 m	1.5	AISI 304	white	Stock item	



3 m

124 Guida conica profilo a T 40 mm Guide rail T-shape 40 mm / konische Führung flach (T) 40 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
124	12463	3 m	1.9	AISI 304	white	On request	
124	12401C	3 m	1.5	AISI 304	white	Stock item	



3 m

143 Guida conica profilo a "T" 19,05 mm Guide rail T-shape 19,05 mm / konische Führung flach (T) 19,05 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
143	14363	3 m	1.9	AISI 304	white	On request	
143	14301C	3 m	1.5	AISI 304	white	Stock item	




3 m

141 Guida conica profilo a "T" 57,15 mm Guide rail T-shape 57,15 mm / konische Führung flach (T) 57,15 mm

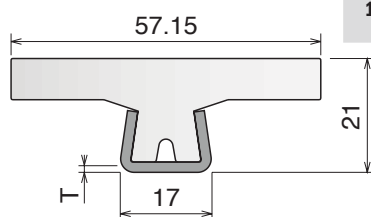



Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
141	14163	3 m	1.9	AISI 304	white	On request	
141	14101C	3 m	1.5	AISI 304	white	Stock item	



3 m

142 Guida conica profilo a "T" 43,2 mm Guide rail T-shape 43,2 mm / konische Führung flach (T) 43,2 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
142	14263	3 m	1.9	AISI 304	white	On request	
142	14201C	3 m	1.5	AISI 304	white	Stock item	



3 m

125 Guida conica profilo a "L" 31,75 mm Guide rail L-shape 31,75 mm / konische Führung flach (L) 31,75 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
125	12563	3 m	1.9	AISI 304	white	On request	

125	12501C	3 m	1.5	AISI 304	white	Stock item	
-----	--------	-----	-----	----------	-------	------------	--



144 Guida conica profilo a "L" 31,75 mm Guide rail L-shape 31,75 mm / konische Führung flach (L) 31,75 mm





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
144	14463	3 m	1.9	AISI 304	white	On request	

144	14401C	3 m	1.5	AISI 304	white	Stock item	
-----	--------	-----	-----	----------	-------	------------	--



184 Guida conica per catena Guide rail for chain / konische Führung





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
184	18463	3 m	1.9	AISI 304	white	On request	

184	18401C	3 m	1.5	AISI 304	white	Stock item	
-----	--------	-----	-----	----------	-------	------------	--




145 Guida tappeto Belt side guide / Seitenführung für Mattenkette



Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
145	14563	3 m	1.9	AISI 304	BluLub	On request	

145	14503C	3 m	1.5	AISI 304	BluLub	Stock item	
-----	--------	-----	-----	----------	--------	------------	--



Bendable profile, generally used with sideflexing belt 600 series





Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)


130

Profilo in alluminio

Aluminum rail for bottle guide / Aluminium profil




Type A



Type B

Part	Article-Nr.	L	Material	Type	Availability
130	13001C	3 m	Aluminium	A	Stock item
130	13001	6 m	Aluminium	A	On request
130	13002C	3 m	Aluminium	B	On request





3/6 m

188

Profilo in alluminio

Aluminum rail for bottle guide / Aluminium profil



Part	Article-Nr.	L	Material	Availability
188	18801C	3 m	Aluminium	Stock item
188	18801	6 m	Aluminium	On request





3/6 m


131

Profilo guida bottiglia

Plastic rail for bottle guide / Flaschenführungs profil




Type A



Type B

Part	Article-Nr.	Color	Type	Availability
131	13101B	BluLub	A	Stock item
131	13101	grey	A	Stock item
131	13102B	BluLub	B	On request
131	13102	grey	B	On request




3/6 m

199

Macchina curvatrice


Bending machine / Biegemaschine

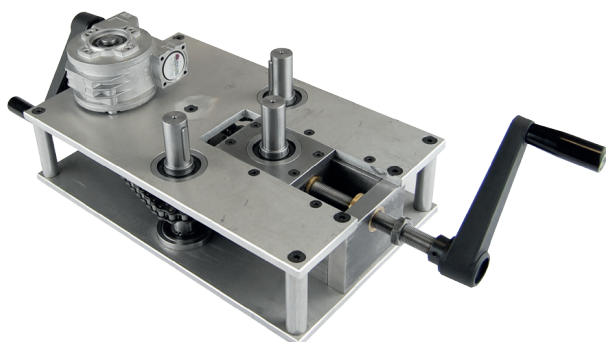

Part	Article-Nr.
199	19999

151

Rulli per macchina curvatrice
Roller for bending machine / Rollen für Biegemaschine





Internal curve






External curve



Part	Article-Nr.	Suitable for Part.
151	15101	119 - 120 - 121






Part	Article-Nr.	Suitable for Part.
151	15102	122 - 123 - 124 - 142 - 140 - 146

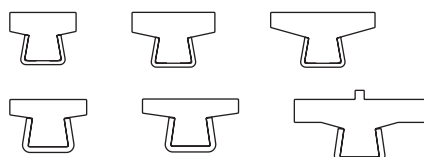




Part	Article-Nr.	Suitable for Part.
151	15103	141



Part	Article-Nr.	Suitable for Part.
151	15104	144




Part	Article-Nr.	Suitable for Part.
151	15105	for Ø8-Ø10-Ø12 - Ø1/2"-Ø5/8"



151

Rulli per macchina curvatrice
Roller for bending machine / Rollen für Biegemaschine





Internal curve





External curve




Part	Article-Nr.	Suitable for Part.
151	15109	358






Part	Article-Nr.	Suitable for Part.
151	15110	360





Part	Article-Nr.	Suitable for Part.
151	15106	359



Part	Article-Nr.	Suitable for Part.
151	15107	361



Part	Article-Nr.	Suitable for Part.
151	15108	117





Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo.
BluLub, new material with reduced coefficient of friction and higher wear resistance.
 BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient:
 $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$) Operating temperature: -40 to 176°F (-40 to +80°C)


170-168-169-1036-1037

Guide estruse / Extruded profiles / Extrudiertes Profil



170 Guida collo Neck guide / Nackenführung




Part	Article-Nr.	L	Material	Availability
170	17001B	3 m	BluLub	Stock item
170	17002B	6 m	BluLub	On request
170	17000B	30 m	BluLub	On request





168 Guida collo Neck guide / Nackenführung





Part	Article-Nr.	L	Material	Availability
168	16801B	3 m	BluLub	Stock item
168	16802B	6 m	BluLub	On request
168	16800B	30 m	BluLub	On request



169 Guida collo Neck guide / Nackenführung





Part	Article-Nr.	L	Material	Availability
169	16901B	3 m	BluLub	Stock item
169	16902B	6 m	BluLub	On request
169	169003	30 m	BluLub	On request



1036 Guida collo Neck guide / Nackenführung

Fit on 1.8-2 mm





Part	Article-Nr.	L	Material	Availability
1036	103600B	30 m	BluLub	Stock item



1037 Guida collo Neck guide / Nackenführung

Fit on 3 mm





Part	Article-Nr.	L	Material	Availability
1037	103700B	30 m	BluLub	Stock item





167

Guida collo
Neck guide / Nackenführung

Fit on 1.8-2 mm





Part	Article-Nr.	L	Material	Availability
167	16700BC	3 m	BluLub	Stock item
167	16700B	6 m	BluLub	Stock item
167	16700B-30	30 m	BluLub	Stock item
167	16700B-75	75 m	BluLub	Stock item



171

Guida collo
Neck guide / Nackenführung

Fit on 3 mm





Part	Article-Nr.	L	Material	Availability
171	17100B	30 m	BluLub	Stock item



172

Guida collo
Neck guide / Nackenführung



Part	Article-Nr.	L	Material	Availability
172	17200B	30 m	BluLub	Stock item



173

Guida collo
Neck guide / Nackenführung

Fit on 1.8-2 mm





Part	Article-Nr.	L	Material	Availability
173	17300B	30 m	BluLub	Stock item



192

Guida collo
Neck guide / Nackenführung

Fit on 1.8-2 mm



Part	Article-Nr.	L	Material	Availability
192	19200B	30 m	BluLub	Stock item



Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo.
BluLub, new material with reduced coefficient of friction and higher wear resistance.
 BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient:
 $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$) Operating temperature: -40 to 176 °F (-40 to +80 °C)



1062-1068-1072-1073

Guide estruse / Extruded profiles / Extrudiertes Profil

1062

Guida collo
Neck guide / Nackenführung

Fit on 1.8-2 mm





Part	Article-Nr.	L	Material	Availability
1062	106200B	30 m	BluLub	Stock item



1068

Guida collo
Neck guide / Nackenführung

Fit on 1.8-2 mm





Part	Article-Nr.	L	Material	Availability
1068	106800B	30 m	BluLub	Stock item



1072

Guida collo
Neck guide / Nackenführung

Fit on 1.8-2 mm





Part	Article-Nr.	L	Material	Availability
1072	107200B	30 m	BluLub	Stock item



1073

Guida collo
Neck guide / Nackenführung

Fit on 1.8-2 mm



Part	Article-Nr.	L	Material	Availability
1073	107300B	30 m	BluLub	Stock item



Material:

Polyethylene UHMW-PE with molecular density 9,200,000 g/mol



Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

163

Profilo 25 mm per guida in alluminio

Profile 25 mm for aluminum guide / C-Profil f. Aluminiumprofil





Part	Article-Nr.	A	L	Colour	Availability
163	16303C	25,4	3 m	white	Stock item
163	16303	25,4	6 m	white	On request
163	16313C	31,75	3 m	white	Stock item
163	16313	31,75	6 m	white	On request
163	16323C	35,0	3 m	white	Stock item
163	16323	35,0	6 m	white	On request
163	16324C	38,1	3 m	white	Stock item
163	16324	38,1	6 m	white	On request

160

Profilo 20 mm per guida in alluminio

Profile 20 mm for aluminum guide / C-Profil f. Aluminiumprofil





Part	Article-Nr.	L	Colour	Availability
160	16003C	3 m	white	Stock item
160	16003	6 m	white	On request

161

Profilo 20 mm per guida in alluminio

Profile 20 mm for aluminum guide / C-Profil f. Aluminiumprofil





Part	Article-Nr.	L	Colour	Availability
161	16103C	3 m	white	Stock item
161	16103	6 m	white	On request

162

Profilo tondo per guida in alluminio

Round profile for aluminum guide / Pilzprofil f. Aluminiumprofil





Part	Article-Nr.	L	Colour	Availability
162	16202C	3 m	green	Stock item
162	16202	6 m	green	On request
162	16203C	3 m	white	Stock item
162	16203	6 m	white	On request

164

Guida in alluminio

Aluminum guide / Aluminiumprofil



Part	Article-Nr.	L	Material	Availability
164	16401C	3 m	Aluminium	Stock item
164	16401	6 m	Aluminium	On request



Fixing screw:
M8 hex.head
or PART 362



165

Guida in alluminio

Aluminum guide / Aluminiumprofil



Part	Article-Nr.	L	Material	Availability
165	16501C	3 m	Aluminium	Stock item
165	16501	6 m	Aluminium	On request

Fixing screw:
M8 hex.head
or PART 362





Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo.
BluLub, new material with reduced coefficient of friction and higher wear resistance.
 BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient:
 $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$) Operating temperature: -40 to 176 °F (-40 to +80 °C)

154-155-134

Guide estruse / Extruded profiles / Extrudiertes Profil

154 Guida laterale Side guide rail / Seitenführungen





Part	Article-Nr.	L	Colour	Availability
154	15401C	3 m	white	Stock item
154	15401	6 m	white	On request
154	15401BC	3 m	BluLub	Stock item
154	15401B	6 m	BluLub	On request




3/6 m

155 Guida laterale Side guide rail / Seitenführungen





Part	Article-Nr.	L	Colour	Availability
155	15501C	3 m	green	Stock item
155	15501	6 m	green	On request

Fixing screw:
M8 hex.head
or **PART 362**



3/6 m

134 Guida standard Standard guide rail / Seitenführung



Part	Article-Nr.	L	Colour	Availability
134	13401C	3 m	green	Stock item
134	13401	6 m	green	On request



3/6 m

Material:

Polyethylene UHMW-PE with molecular density 9,200,000 g/mol



Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)

Operating temperature: -40 to 176°F (-40 to +80°C)

1041

Profilo "C"
C-Profile / C-Profil

Fit on 5x25 mm

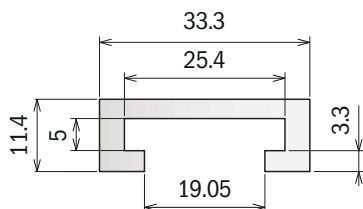

Part	Article-Nr.	L	Colour	Availability
1041	104103C	3 m	white	On request
1041	104103	6 m	white	On request



**NORTH
AMERICA
STANDARD**



1042

Profilo "C"
C-Profile / C-Profil

Fit on 6x50 mm

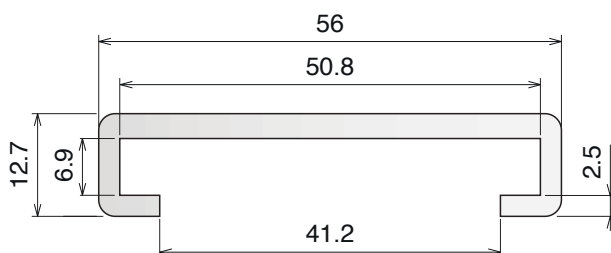

Part	Article-Nr.	L	Colour	Availability
1042	104203C	3 m	white	On request
1042	104203	6 m	white	On request



**NORTH
AMERICA
STANDARD**



1043

Profilo "C"
C-Profile / C-Profil

Fit on 6x50 mm

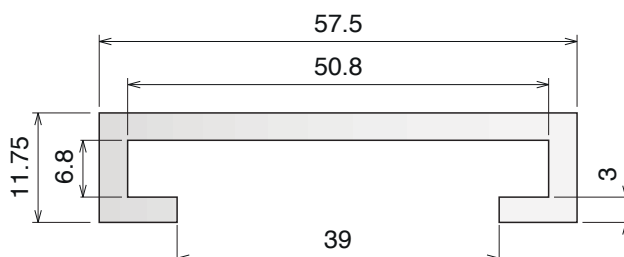

Part	Article-Nr.	L	Colour	Availability
1043	104303C	3 m	white	On request
1043	104303	6 m	white	On request

**NORTH
AMERICA
STANDARD**



Material:

Polyethylene UHMW-PE with molecular density 9,200,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

1044-1045-1053-1054



Guide estruse / Extruded profiles / Extrudiertes Profil

1044

Profilo "C"
C-Profile / C-Profil

Fit on 12.7x38.1 mm

Part	Article-Nr.	L	Colour	Availability
1044	104403C	3 m	white	On request
1044	104403	6 m	white	On request

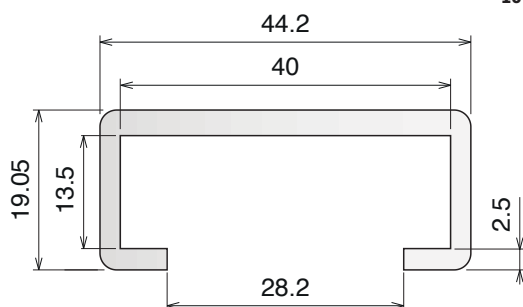

**NORTH
AMERICA
STANDARD**





1045

Profilo "C"
C-Profile / C-Profil

Fit on 12.7x50.8 mm

Part	Article-Nr.	L	Colour	Availability
1045	104503C	3 m	white	On request
1045	104503	6 m	white	On request

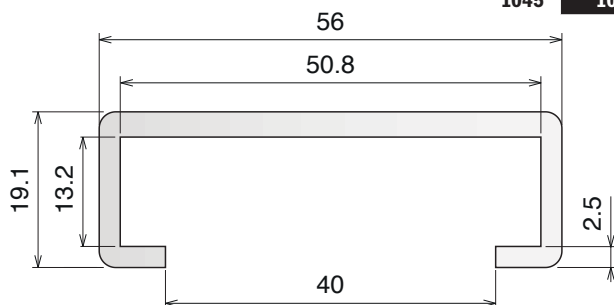

**NORTH
AMERICA
STANDARD**





1053

Copri profilo
Bar cover / Abdeckprofil

Fit on 6.35x38.1 mm

Part	Article-Nr.	L	Colour	Availability
1053	105303C	3 m	white	On request
1053	105303	6 m	white	On request

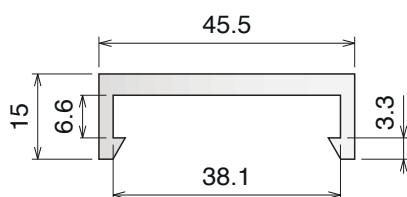

**NORTH
AMERICA
STANDARD**





1054

Copri profilo
Bar cover / Abdeckprofil

Fit on 6.35x38.1 mm

Part	Article-Nr.	L	Colour	Availability
1054	105403C	3 m	white	On request
1054	105403	6 m	white	On request

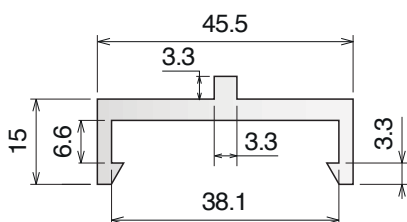

**NORTH
AMERICA
STANDARD**





Material:

Polyethylene UHMW-PE with molecular density 9,200,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

135

Guida laterale H.78 mm
Side guide H.78 mm / Seitenführung H.78 mm

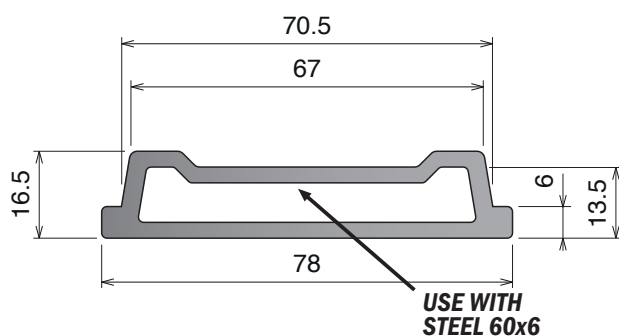

Part	Article-Nr.	L	Colour	Availability
135	13501C	3 m	black	Stock item
135	13501	6 m	black	On request
135	13502C	3 m	blu	Stock item
135	13502	6 m	blu	On request





Used with:
PART 394
PART 331



3/6 m

136

Guida laterale H.87 mm
Side guide H.87 mm / Seitenführung H.87 mm

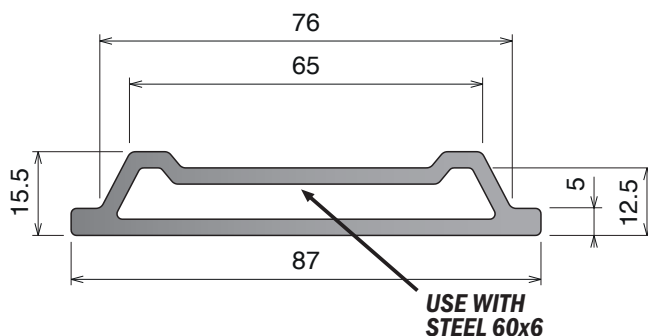

Part	Article-Nr.	L	Colour	Availability
136	13601C	3 m	black	Stock item
136	13601	6 m	black	On request
136	13602C	3 m	blu	Stock item
136	13602	6 m	blu	On request



Used with:
PART 394
PART 345



3/6 m

Material:



Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
 Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
 Operating temperature: -40 to 176°F (-40 to +80°C)

137

Guide estruse / Extruded profiles / Extrudiertes Profil


137

Profilo "C"
C-Profile / C-Profil

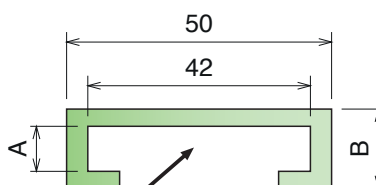



USE WITH STEEL
40x8 or 40x10

Part	Article-Nr.	L	A	B	Colour	Availability
137	13701C	3 m	8,5	14	green	Stock item
137	13701	6 m	8,5	14	green	On request
137	13701BC	3 m	8,5	14	BluLub	Stock item
137	13701B	6 m	8,5	14	BluLub	On request
137	13702C	3 m	8,5	14	black	Stock item
137	13702	6 m	8,5	14	black	On request
137	13711C	3 m	10,5	16	green	Stock item
137	13711	6 m	10,5	16	green	On request
137	13711BC	3 m	10,5	16	BluLub	Stock item
137	13711B	6 m	10,5	16	BluLub	On request




3/6 m

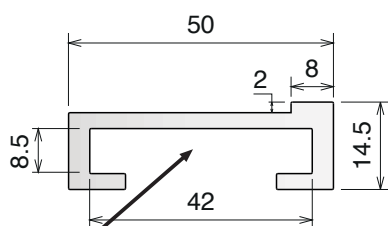

USE WITH STEEL
40x8



Part	Article-Nr.	L	Colour	Availability
137	13720	6 m	white	On request



6 m

117

Profilo Omega M-Profile / M-Profil





Part	Article-Nr.	L	A	Material	Availability
117	11701C	3 m	8	AISI 304	Stock item
117	11701	6 m	8	AISI 304	On request
117	11702C	3 m	10	AISI 304	Stock item
117	11702	6 m	10	AISI 304	On request
117	11703C	3 m	6	AISI 304	Stock item
117	11703	6 m	6	AISI 304	On request




3/6 m

1055

Guida in acciaio inox Stainless steel guide / Edelstahlprofil

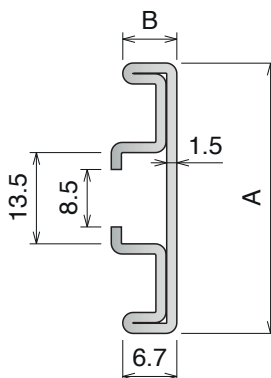


Part	Article-Nr.	L	A	B	Material	Availability
1055	105501C	3 m	40	8	AISI 304	Stock item
1055	105501	6 m	40	8	AISI 304	On request



**Stainless
steel
AISI 304**

40x8


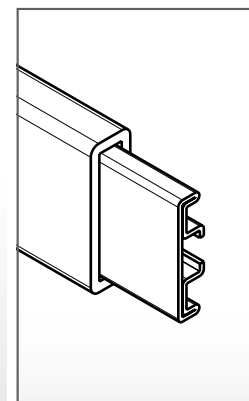


Used with part:

**13701C / 13701BC
18914C / 18914
18301C / 18301**

159

Guida in alluminio Aluminum guide / Aluminiumprofil

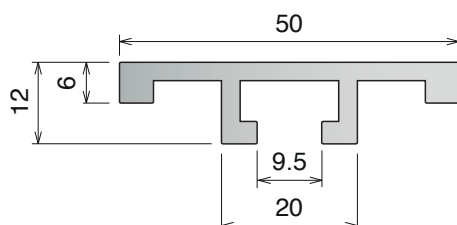

Part	Article-Nr.	L	Material	Availability
159	15901C	3 m	Aluminium	Stock item
159	15901	6 m	Aluminium	On request

Fixing screw:
M8 hex.head
or **PART 362**



3/6 m

Material:

Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)


1063-1064

Guide estruse / Extruded profiles / Extrudiertes Profil


1063

Guida laterale
Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Colour	Availability
1063	106301C	3 m	30x4	black	Stock item

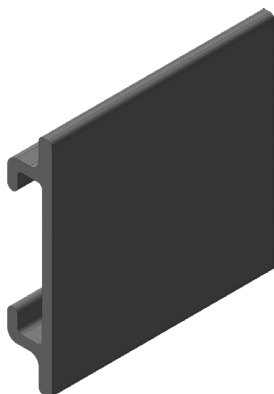

3 m

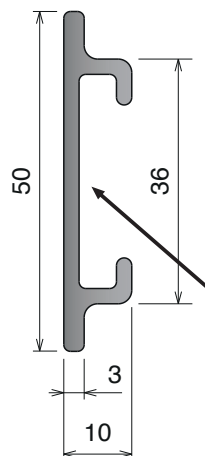


**USE WITH
STEEL 30x4**


1064

Guida laterale
Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Colour	Availability
1064	106401C	3 m	55x4	black	Stock item

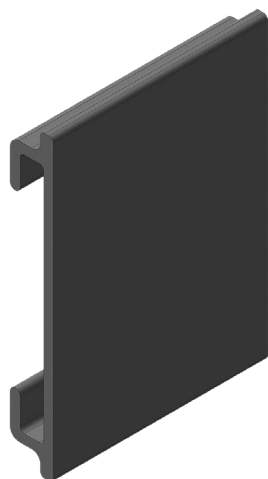


3 m

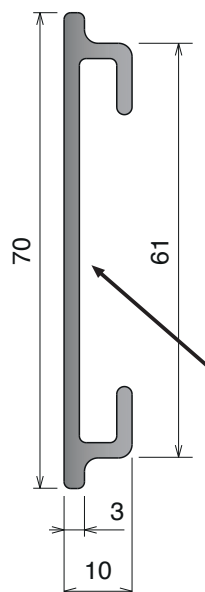


**USE WITH
STEEL 55x4**

158


Guida laterale Side guide rail / Seitenführung

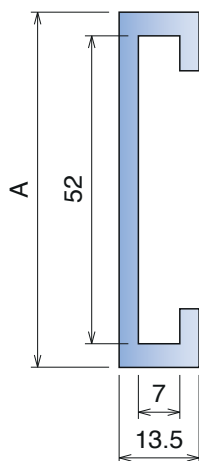


Part	Article-Nr.	L	A	Material	Availability
158	15800C	3 m	60	grey	Stock item
158	15800	6 m	60	grey	On request
158	15800BC	3 m	60	BluLub	Stock item
158	15800B	6 m	60	BluLub	On request

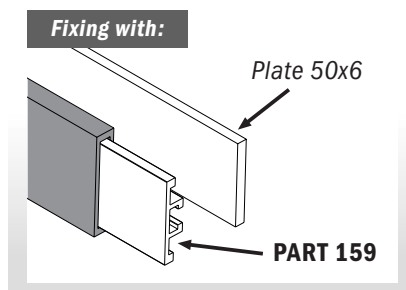

Guida laterale Side guide rail / Seitenführung

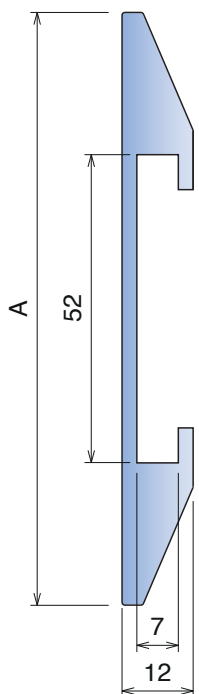

Part	Article-Nr.	L	A	Material	Availability
158	15801C	3 m	90	grey	On request
158	15801	6 m	90	grey	On request
158	15801BC	3 m	90	BluLub	Stock item
158	15801B	6 m	90	BluLub	On request
158	15802C	3 m	100	grey	On request
158	15802	6 m	100	grey	On request
158	15802BC	3 m	100	BluLub	Stock item
158	15802B	6 m	100	BluLub	On request
158	15803C	3 m	120	grey	On request
158	15803	6 m	120	grey	On request
158	15803BC	3 m	120	BluLub	Stock item
158	15803B	6 m	120	BluLub	On request


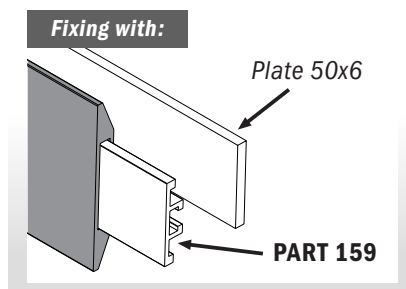


Material: Polyethylene HMW-PE
BluLub, new material with reduced coefficient of friction and higher wear resistance.
 BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient:
 $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$) Operating temperature: -40 to 176 °F (-40 to +80 °C)



182-1065

Guide estruse / Extruded profiles / Extrudiertes Profil



182 Guida laterale Side guide rail / Seitenführung

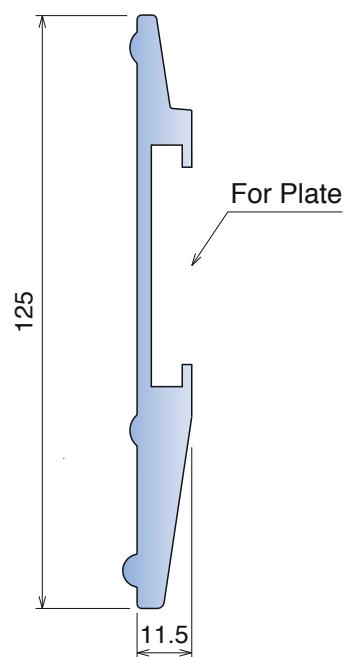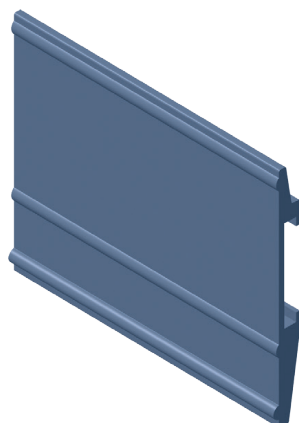


Part	Article-Nr.	L	For plate	Material	Availability
182	18204C	3 m	50x6	grey	On request
182	18214C	3 m	40x8	grey	On request
182	18200BC	3 m	50x6	BluLub	On request
182	18210BC	3 m	40x8	BluLub	On request

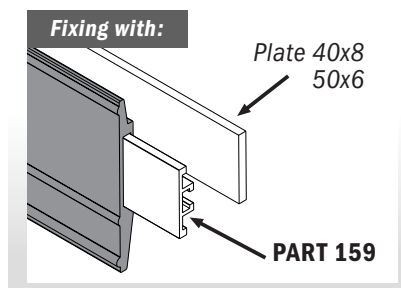

1065 Guida laterale Side guide rail / Seitenführung

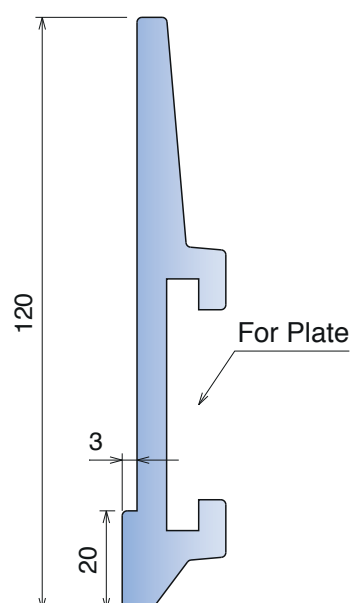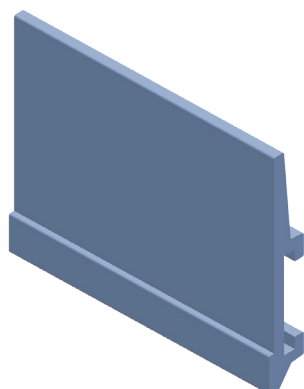

Part	Article-Nr.	L	For plate	Material	Availability
1065	106504C	3 m	50x6	grey	On request
1065	106500BC	3 m	50x6	BluLub	On request







Material: Polyethylene HMW-PE





BluLub, new material with reduced coefficient of friction and higher wear resistance. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$) Operating temperature: -40 to 176 °F (-40 to +80 °C)

189

Guida laterale
Side guide rail / Seitenführung

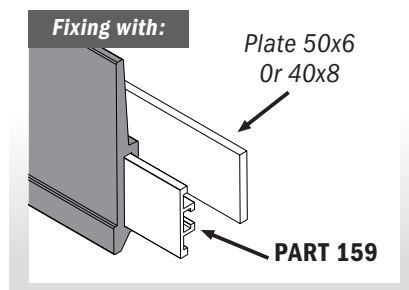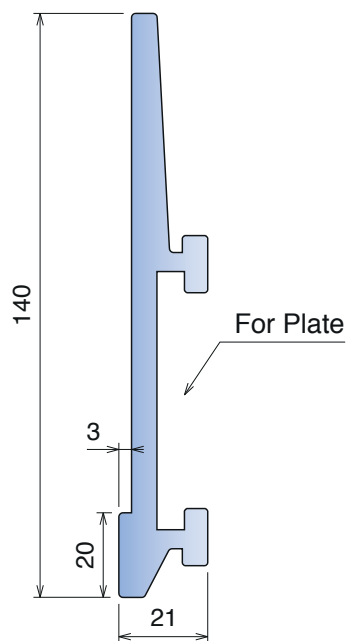
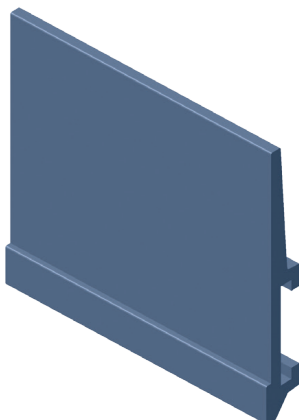


Guida laterale
Side guide rail / Seitenführung

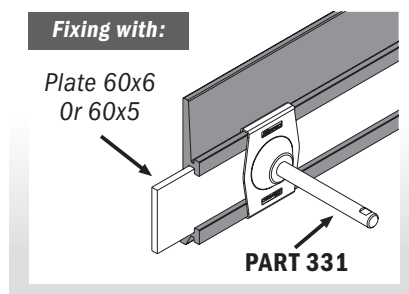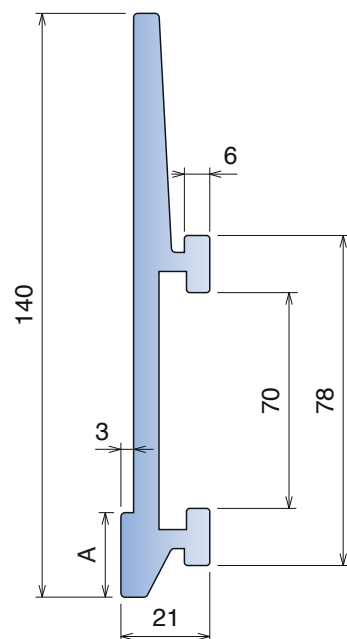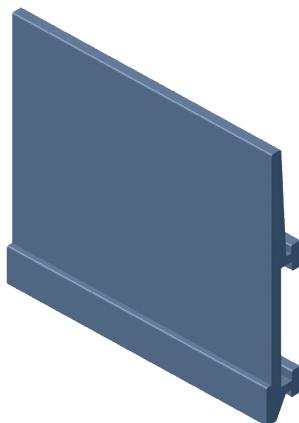



Part	Article-Nr.	L	A	For plate	Material	Availability
189	18924C	3 m	20	60x6	grey	Stock item
189	18920BC	3 m	20	60x6	BluLub	Stock item
189	18934C	3 m	40	60x6	grey	Stock item
189	18930BC	3 m	40	60x6	BluLub	Stock item
189	18944C	3 m	40	60x5	grey	Stock item
189	18940BC	3 m	40	60x5	BluLub	Stock item

193 Guida laterale Side guide rail / Seitenführung

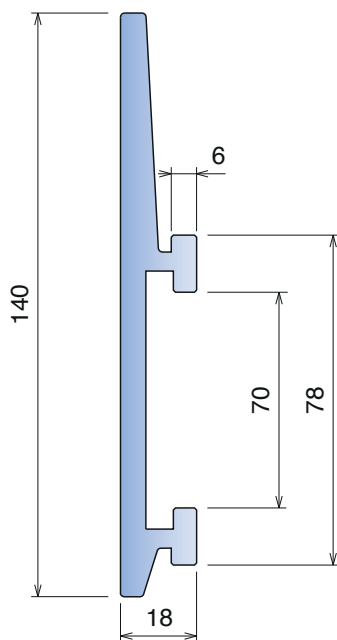
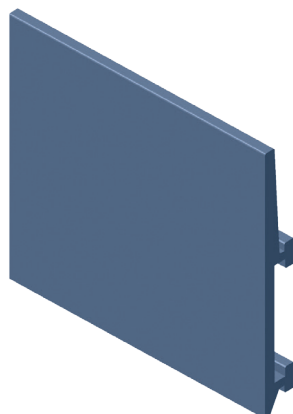


Part	Article-Nr.	L	For plate	Material	Availability
193	19324C	3 m	60x6	grey	Stock item
193	19320BC	3 m	60x6		Stock item

Fixing with:


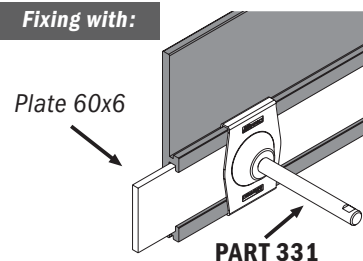


187 Guida laterale Side guide rail / Seitenführung

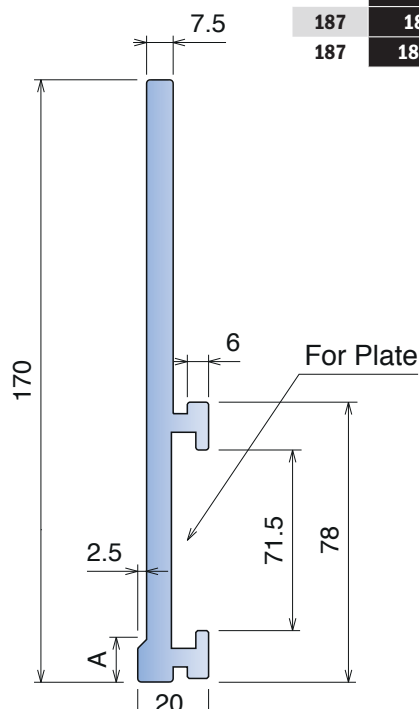
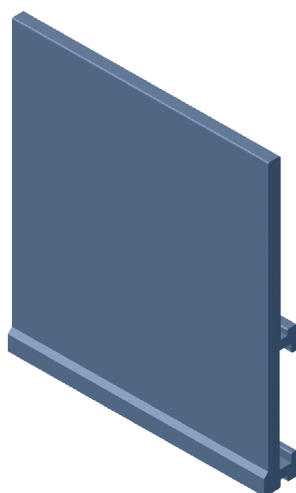


Part	Article-Nr.	L	A	For plate	Material	Availability
187	18724C	3 m	12	60x6	grey	Stock item
187	18720BC	3 m	12	60x6	BluLub	Stock item
187	18734C	3 m	20	60x6	grey	Stock item
187	18730BC	3 m	20	60x6	BluLub	Stock item
187	18744C	3 m	40	60x6	grey	Stock item
187	18740BC	3 m	40	60x6	BluLub	Stock item

Fixing with:

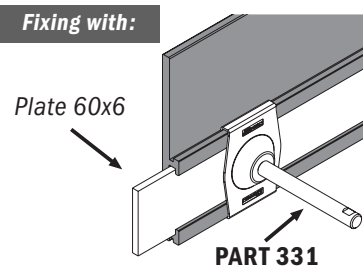

1056 Guida laterale Side guide rail / Seitenführung

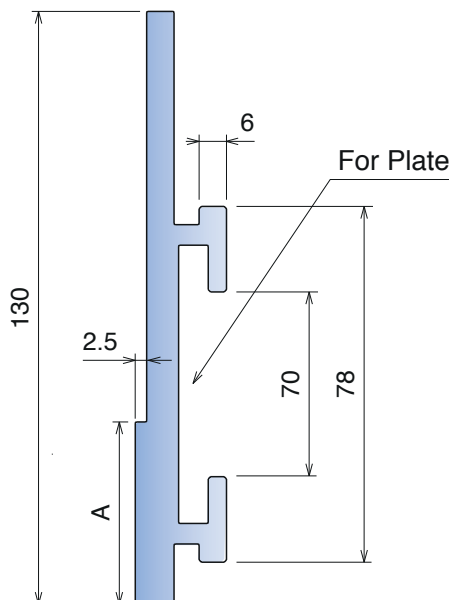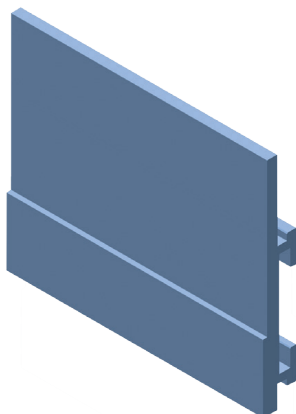

Fixing with:



Plate 60x6

PART 331



3 m

1057 Guida laterale Side guide rail / Seitenführung

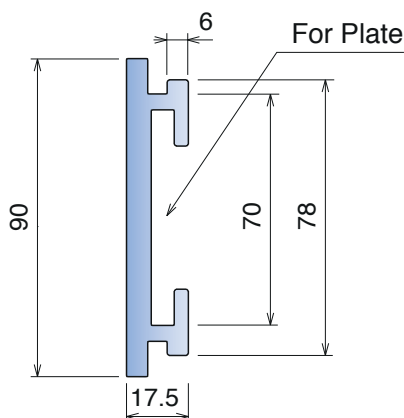

Fixing with:

Plate 60x6

PART 331



3 m

Part	Article-Nr.	L	A	For plate	Material	Availability
1056	105604C	3 m	10	60x6	grey	Stock item
1056	105600BC	3 m	10	60x6	BluLub	Stock item
1056	105634C	3 m	40	60x6	grey	Stock item
1056	105630BC	3 m	40	60x6	BluLub	Stock item

Part	Article-Nr.	L	For plate	Material	Availability
1057	105704C	3 m	60x6	grey	Stock item
1057	105700BC	3 m	60x6	BluLub	Stock item





Material: Polyethylene HMW-PE
BluLub, new material with reduced coefficient of friction and higher wear resistance.
 BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient:
 $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$) Operating temperature: -40 to 176°F (-40 to +80°C)

186-1061

Guide estruse / Extruded profiles / Extrudiertes Profil




186 Guida laterale Side guide rail / Seitenführung

Part	Article-Nr.	L	For plate	Material	Availability
186	18604C	3 m	50x6	grey	On request
186	18600BC	3 m	50x6	BluLub	On request

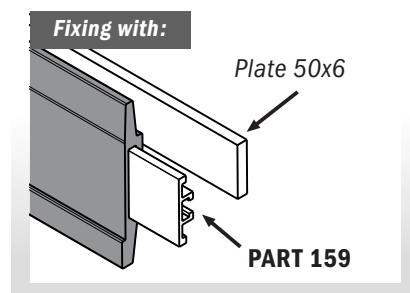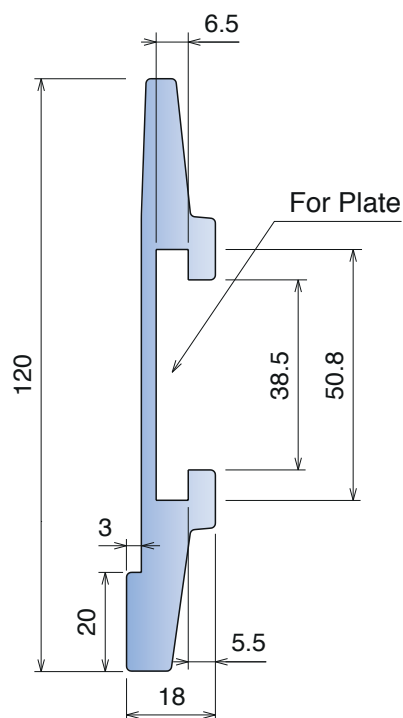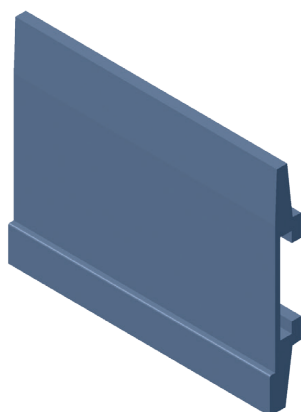

1061 Guida laterale Side guide rail / Seitenführung



Part	Article-Nr.	L	For plate	Material	Availability
1061	106104C	3 m	60x6	grey	On request
1061	106104BC	3 m	60x6	BluLub	On request

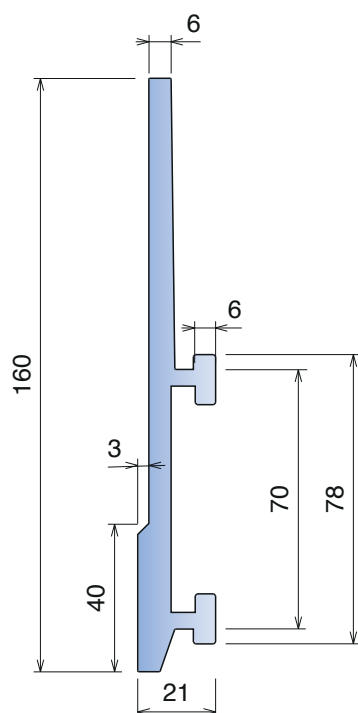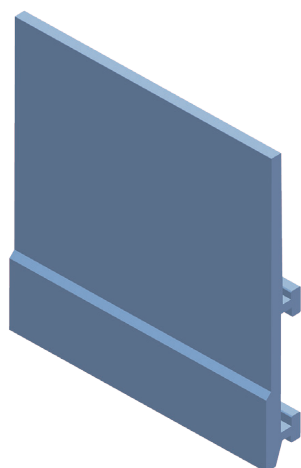

166

Profilo per tondini

Round profile for steel rods / Clip-on Profil für Rundmaterial



Part	Article-Nr.	A	B	C	Colour	Availability
166	16601	8	12	0,5	white	Stock item
166	16602	10	14	0,5	white	Stock item
166	16603	12	16	1	white	Stock item
166	16604	16	20	1,5	white	Stock item





30 m

1039

Profilo per mezzitondi

Half round profile for steel rods / Halbmond Profil



Part	Article-Nr.	L	A	B	Colour	Availability
1039	103923C	3 m	16	20	white	Stock item
1039	103923	6 m	16	20	white	On request
1039	103923-30	30 m	16	20	white	On request
1039	103923-60	60 m	16	20	white	On request



3/6 m





30/60 m

183


Guida laterale

Side guide rail / Seitenführung

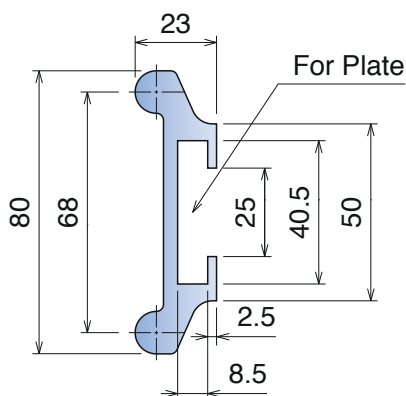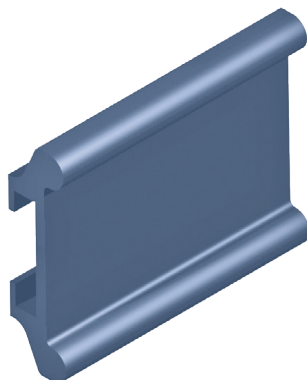

Part	Article-Nr.	L	Colour	Availability
183	18301C	3 m	black	Stock item
183	18301	6 m	black	On request
183	18301BC	3 m	BluLub	Stock item
183	18301B	6 m	BluLub	On request

Fixing with:



3/6 m